



HT32F61244/HT32F61245

Datasheet

**32-Bit Arm® Cortex®-M0+ Music Synthesizer Microcontroller
with Flash Data Memory up to 64 KB Flash, 8 KB SRAM and
16/32 Mbits Flash Data Memory with 16-channel Music
Synthesis Engine (MIDI Engine), DAC, 1 MSPS ADC, UART,
SPI, QSPI, I²C, GPTM, SCTM, BFTM, CRC, LSTM and WDT**

Revision: V1.00 Date: July 29, 2022

Table of Contents

1 General Description	6
2 Features	7
Core	7
On-Chip Memory	7
Flash Memory Controller – FMC	7
Reset Control Unit – RSTCU	8
Clock Control Unit – CKCU	8
Power Control Unit – PWRCU	8
External Interrupt/Event Controller – EXTI	9
Analog to Digital Converter – ADC	9
I/O Ports – GPIO	9
General-Purpose Timer – GPTM	10
Single-Channel Timer – SCTM	10
Basic Function Timer – BFTM	10
Digital to Analog Converter – DAC	11
Music Synthesis Engine (MIDI Engine) – MSE	11
Watchdog Timer – WDT	11
Low Speed Timer – LSTM	11
Inter-Integrated Circuit – I ² C	12
Serial Peripheral Interface – SPI	12
Quad Serial Peripheral Interface – QSPI	12
Universal Asynchronous Receiver Transmitter – UART	13
Cyclic Redundancy Check – CRC	13
Peripheral Direct Memory Access – PDMA	14
SPI Flash Data Memory	14
Debug Support	15
Package and Operation Temperature	15
3 Overview	16
Device Information	16
Block Diagram	17
Memory Map	18
Clock Structure	21
4 SPI Flash Data Memory	22
Standard SPI Mode	23
Quad I/O SPI Mode	23

5 Pin Assignment.....	26
Internal Connection Signals.....	31
6 Application Circuits	32
7 Electrical Characteristics	33
Absolute Maximum Ratings	33
Recommended DC Operating Conditions	33
On-Chip LDO Voltage Regulator Characteristics.....	33
Power Consumption	34
Reset and Supply Monitor Characteristics.....	35
External Clock Characteristics	36
Internal Clock Characteristics	36
PLL Characteristics.....	37
Memory Characteristics	37
I/O Port Characteristics.....	37
ADC Characteristics	39
SCTM/GPTM Characteristics	40
I ² C Characteristics	41
SPI Characteristics	42
QSPI Characteristics	44
Audio D/A Converter Characteristics	47
SPI Flash Data Memory DC Characteristics.....	48
8 Package Information	49
48-pin LQFP (7 mm × 7 mm) Outline Dimensions.....	50
64-pin LQFP (7 mm × 7 mm) Outline Dimensions.....	51

List of Tables

Table 1. Features and Peripheral List	16
Table 2. Register Map	19
Table 3. 48/64-pin LQFP Package	28
Table 4. Pin Description	29
Table 5. Internal Connection Signal Lines	31
Table 6. Absolute Maximum Ratings	33
Table 7. Recommended DC Operating Conditions	33
Table 8. LDO Characteristics	33
Table 9. Power Consumption Characteristics	34
Table 10. V _{DD} Power Reset Characteristics	35
Table 11. LVD/BOD Characteristics	35
Table 12. High Speed External Clock (HSE) Characteristics	36
Table 13. High Speed Internal Clock (HSI) Characteristics	36
Table 14. Low Speed Internal Clock (LSI) Characteristics	37
Table 15. PLL Characteristics	37
Table 16. Flash Memory Characteristics	37
Table 17. I/O Port Characteristics	37
Table 18. ADC Characteristics	39
Table 19. SCTM/GPTM Characteristics	40
Table 20. I ² C Characteristics	41
Table 21. SPI Characteristics	42
Table 22. QSPI Characteristics	44
Table 23. Audio D/A Converter Characteristics	47
Table 24. SPI Flash Data Memory DC Characteristics	48

List of Figures

Figure 1. Block Diagram	17
Figure 2. Memory Map.....	18
Figure 3. Clock Structure	21
Figure 4. 48-pin LQFP Pin Assignment	26
Figure 5. 64-pin LQFP Pin Assignment	27
Figure 6. ADC Sampling Network Model	40
Figure 7. I ² C Timing Diagrams.....	41
Figure 8. SPI Timing Diagrams – SPI Master Mode	43
Figure 9. SPI Timing Diagrams – SPI Slave Mode with CPHA = 1	43
Figure 10. QSPI Timing Diagrams – QSPI Master Mode (1-bit Serial Mode, DUALEN = 0, QUADEN = 0).....	45
Figure 11. QSPI Timing Diagrams – QSPI Master Mode (Dual Mode, DUALEN = 1)	45
Figure 12. QSPI Timing Diagrams – QSPI Master Mode (Quad Mode, QUADEN = 1).....	46
Figure 13. QSPI Timing Diagrams – QSPI Slave Mode with CPHA = 1 (1-bit Serial Mode)	47

1 General Description

These devices are high performance, low power consumption 32-bit microcontrollers based around an Arm® Cortex®-M0+ processor core. The Cortex®-M0+ is a next-generation processor core which is tightly coupled with Nested Vectored Interrupt Controller (NVIC), SysTick timer and including advanced debug support.

The devices operate at a frequency of up to 48 MHz with a Flash accelerator to obtain maximum efficiency. They provide up to 64 KB of embedded Flash memory for code/data storage and 8 KB of embedded SRAM memory for system operation and application program usage. A variety of peripherals, such as ADC, 2-channel DAC, I²C, UART, SPI, QSPI, GPTM, SCTM, BFTM, CRC-16/32, LSTM, WDT, 16-channel music synthesizer, SW-DP (Serial Wire Debug Port), etc., are also implemented in the devices. Several power saving modes provide the flexibility for maximum optimization between wakeup latency and power consumption, an especially important consideration in low power applications.

The devices integrate Wave Table synthesis function. They can operate up to 16 channels of Wave Table synthesis at one time and control the MIDI Engine to generate melody by setting the special registers. The Wave Table synthesis waveform data including instrument tone, MIDI scores, voice, sound effect, etc., are stored in the internal SPI Flash Data Memory. With these features, the devices provide enhanced functions and higher performance.

The above features ensure that the devices are suitable for use in a wide range of applications, especially in areas such as electronic organs, digital pianos, electronic drums, electric guitars, electric accordions and so on.

arm CORTEX

2 Features

Core

- 32-bit Arm® Cortex®-M0+ processor core
- Up to 48 MHz operating frequency
- Single-cycle multiplication
- Integrated Nested Vectored Interrupt Controller (NVIC)
- 24-bit SysTick timer

The Cortex®-M0+ processor is a very low gate count, highly energy efficient processor that is intended for microcontrollers and deeply embedded applications that require an area optimized, low-power processor. The processor is based on the ARMv6-M architecture and supports Thumb® instruction sets; single-cycle I/O ports; hardware multiplier and low latency interrupt respond time.

On-Chip Memory

- Up to 64 KB on-chip Flash memory for instruction/data and options storage
- 8 KB on-chip SRAM
- Supports multiple booting modes

The Arm® Cortex®-M0+ processor accesses and debug accesses share the single external interface to external AHB peripherals. The processor accesses take priority over debug accesses. The maximum address range of the Cortex®-M0+ is 4 GB since it has a 32-bit bus address width. Additionally, a pre-defined memory map is provided by the Cortex®-M0+ processor to reduce the software complexity of repeated implementation by different device vendors. However, some regions are used by the Arm® Cortex®-M0+ system peripherals. Refer to the Arm® Cortex®-M0+ Technical Reference Manual for more information. Figure 2 in the Overview chapter shows the memory map of the device, including code, SRAM, peripheral and other pre-defined regions.

Flash Memory Controller – FMC

- Flash accelerator to obtain maximum efficiency
- 32-bit word programming with In System Programming Interface (ISP) and In Application Programming (IAP)
- Flash protection capability to prevent illegal access

The Flash Memory Controller, FMC, provides all the necessary functions and pre-fetch buffer for the embedded on-chip Flash Memory. Since the access speed of the Flash Memory is slower than the CPU, a wide access interface with a pre-fetch buffer and cache are provided for the Flash Memory in order to reduce the CPU waiting time which will cause CPU instruction execution delay. The Flash Memory word programming/page erase functions are also provided.

Reset Control Unit – RSTCU

- Supply supervisor:
 - Power On Reset / Power Down Reset – POR/PDR
 - Brown-Out Detector – BOD
 - Programmable Low Voltage Detector – LVD

The Reset Control Unit, RSTCU, has three kinds of reset, a power on reset, a system reset and an APB unit reset. The power on reset, known as a cold reset, resets the full system during power up. A system reset resets the processor core and peripheral IP components with the exception of the SW-DP controller. The resets can be triggered by an external signal, internal events and the reset generators.

Clock Control Unit – CKCU

- External 4 to 16 MHz crystal oscillator
- Internal 8 MHz RC oscillator trimmed to ± 2 % accuracy at 3.3 V operating voltage and 25 °C operating temperature
- Internal 32 kHz RC oscillator
- Integrated system clock PLL
- Independent clock divider and gating bits for peripheral clock sources

The Clock Control unit, CKCU, provides a range of oscillator and clock functions. These include a High Speed Internal RC oscillator (HSI), a High Speed External crystal oscillator (HSE), a Low Speed Internal RC oscillator (LSI), a Phase Lock Loop (PLL), an HSE clock monitor, clock prescalers, clock multiplexers, APB clock divider and gating circuitry. The clocks of AHB, APB and Cortex®-M0+ are derived from the system clock (CK_SYS) which can come from the LSI, HSI, HSE or PLL. The Watchdog Timer and Low Speed Timer (LSTM) use the LSI as their clock source.

Power Control Unit – PWRCU

- Single V_{DD} power supply: 2.3 V to 3.6 V
- Integrated 1.5 V LDO regulator for MCU core, peripherals and memories power supply
- V_{DD} power supply for LSTM
- Two power domains: V_{DD} , V_{CORE}
- Four power saving modes: Sleep, Deep-Sleep1, Deep-Sleep2, Power-Down

Power consumption can be regarded as one of the most important issues for many embedded system applications. Accordingly the Power Control Unit, PWRCU, in the devices provides many types of power saving modes such as Sleep, Deep-Sleep1, Deep-Sleep2 and Power-Down mode. These operating modes reduce the power consumption and allow the application to achieve the best trade-off between the conflicting demands of CPU operating time, speed and power consumption.

External Interrupt/Event Controller – EXTI

- Up to 16 EXTI lines with configurable trigger source and type
- All GPIO pins can be selected as EXTI trigger source
- Source trigger type includes high level, low level, negative edge, positive edge or both edges
- Individual interrupt enable, wakeup enable and status bits for each EXTI line
- Software interrupt trigger mode for each EXTI line
- Integrated deglitch filter for short pulse blocking

The External Interrupt/Event Controller, EXTI, comprises 16 edge detectors which can generate a wake-up event or interrupt requests independently. Each EXTI line can also be masked independently.

Analog to Digital Converter – ADC

- 12-bit SAR ADC engine
- Up to 1 Msps conversion rate
- Up to 16 external analog input channels

A 12-bit multi-channel ADC is integrated in the devices. There are multiplexed channels, which include 16 external analog signal channels and 2 internal channels which can be measured. If the input voltage is required to remain within a specific threshold window, an Analog Watchdog function will monitor and detect these signals. An interrupt will then be generated to inform the device that the input voltage is not within the preset threshold levels. There are three conversion modes to convert an analog signal to digital data. The ADC can be operated in one shot, continuous and discontinuous conversion modes.

I/O Ports – GPIO

- Up to 49 GPIOs
- Port A, B, C, D are mapped as 16 external interrupts – EXTI
- Almost all I/O pins have a configurable output driving current.

There are up to 49 General Purpose I/O pins, GPIO, named PA0 ~ PA15, PB0 ~ PB15, PC0 ~ PC15 and PD0 for the implementation of logic input/output functions. Each of the GPIO ports has a series of related control and configuration registers to maximize flexibility and to meet the requirements of a wide range of applications.

The GPIO ports are pin-shared with other alternative functions to obtain maximum functional flexibility on the package pins. The GPIO pins can be used as alternative functional pins by configuring the corresponding registers regardless of the input or output pins. The external interrupts on the GPIO pins of the devices have related control and configuration registers in the External Interrupt Control Unit, EXTI.

General-Purpose Timer – GPTM

- 16-bit up, down, up/down auto-reload counter
- Up to 4 independent channels
- 16-bit programmable prescaler that allows division of the prescaler clock source by any factor between 1 and 65536 to generate the counter clock frequency
- Input Capture function
- Compare Match Output
- PWM waveform generation with Edge-aligned and Center-aligned
- Single Pulse Mode Output
- Encoder interface controller with two inputs using quadrature decoder

The General-Purpose Timer, GPTM, consists of one 16-bit up/down-counter, four 16-bit Capture/Compare Registers (CCRs), one 16-bit Counter Reload Register (CRR) and several control/status registers. They can be used for a variety of purposes including general time measurement, input signal pulse width measurement, output waveform generation such as single pulse generation or PWM output generation. The GPTM also supports an Encoder Interface using a quadrature decoder with two inputs.

Single-Channel Timer – SCTM

- 16-bit up and auto-reload counter
- One channel for each timer
- 16-bit programmable prescaler that allows division of the prescaler clock source by any factor between 1 and 65536 to generate the counter clock frequency
- Input Capture function
- Compare Match Output
- PWM waveform generation with Edge-aligned

The Single-Channel Timer, SCTM, consists of one 16-bit up-counter, one 16-bit Capture/Compare Register (CCR), one 16-bit Counter-Reload Register (CRR) and several control/status registers. It can be used for a variety of purposes including general timer, input signal pulse width measurement or output waveform generation such as single pulse generation or PWM output.

Basic Function Timer – BFTM

- 32-bit compare match count-up counter – no I/O control
- One shot mode – stops counting when compare match occurs
- Repetitive mode – restarts counter when compare match occurs

The Basic Function Timer, BFTM, is a simple count-up 32-bit counter designed to measure time intervals and generate a one shot or repetitive interrupts. The BFTM can operate in two functional modes which are repetitive and one shot modes. In the repetitive mode the BFTM restarts the counter when a compare match event occurs. The BFTM also supports a one shot mode which will force the counter to stop counting when a compare match event occurs.

Digital to Analog Converter – DAC

- Two 16-bit high resolution D/A converters with excellent frequency response characteristics and good power consumption for stereo audio output.

Music Synthesis Engine (MIDI Engine) – MSE

- Up to 16 simultaneous sounds
- 10-bit Volume Control
- Output sampling frequency up to 50 kHz
- Waveform data lengths of 8, 12 or 16 bits
- Stereo output
- Supports Repeat loop Play
- Supports PDMA interface

Watchdog Timer – WDT

- 12-bit down counter with 3-bit prescaler
- Provides reset to the system
- Programmable watchdog timer window function
- Register write protection function

The Watchdog Timer, WDT, is a hardware timing circuit that can be used to detect system failures due to software trapped in a deadlock. It includes a 12-bit count-down counter, a prescaler, a WDT delta value register, WDT operation control circuitry and a WDT protection mechanism. If the software does not reload the counter value before a Watchdog Timer underflow occurs, a reset will be generated when the counter underflows. In addition, a reset is also generated if the software reloads the counter when the counter value is greater than the WDT delta value. It means that the counter must be reloaded within a limited timing window using a specific method. The Watchdog Timer counter can be stopped while the processor is in the debug mode. The register write protection function can be enabled to prevent an unexpected change in the Watchdog Timer configuration.

Low Speed Timer – LSTM

- 24-bit up-counter with a programmable prescaler
- Alarm function
- Interrupt and Wake-up event

Low Speed Timer, LSTM, circuitry includes the APB interface, a 24-bit up-counter, a control register, a prescaler, a compare register and a status register. The LSTM circuits are located in the V_{DD} power domain. When the device enters the power-saving mode, the LSTM counter is used as a wakeup timer to let the system resume from the power saving mode.

Inter-Integrated Circuit – I²C

- Supports both master and slave modes with a frequency of up to 1 MHz
- Provides an arbitration function and clock synchronization
- Supports 7-bit and 10-bit addressing modes and general call addressing
- Supports slave multi-addressing mode using address mask function

The I²C is an internal circuit allowing communication with an external I²C interface which is an industry standard two-wire serial interface used for connection to external hardware. These two serial lines are known as a serial data line, SDA, and a serial clock line, SCL. The I²C module provides three data transfer rates: 100 kHz in the Standard mode, 400 kHz in the Fast mode and 1 MHz in the Fast plus mode. The SCL period generation register is used to setup different kinds of duty cycle implementations for the SCL pulse.

The SDA line which is connected directly to the I²C bus is a bidirectional data line between the master and slave devices and is used for data transmission and reception. The I²C also has an arbitration detect function and clock synchronization function to prevent situations where more than one master attempts to transmit data to the I²C bus at the same time.

Serial Peripheral Interface – SPI

- Supports both master and slave mode
- Frequency of up to ($f_{\text{PCLK}}/2$) MHz for the master mode and ($f_{\text{PCLK}}/3$) MHz for the slave mode
- FIFO Depth: 8 levels
- Multi-master and multi-slave operation

The Serial Peripheral Interface, SPI, provides an SPI protocol data transmit and receive function in both master and slave modes. The SPI interface uses 4 pins, among which are the serial data input and output lines MISO and MOSI, the clock line, SCK, and the slave select line, SEL. One SPI device acts as a master device which controls the data flow using the SEL and SCK signals to indicate the start of data communication and the data sampling rate. To receive the data bits, the streamlined data bits are latched on a specific clock edge and stored in the data register or in the RX FIFO. Data transmission is carried out in a similar way with the reverse sequence. The mode fault detection provides a capability for multi-master applications.

Quad Serial Peripheral Interface – QSPI

- Supports both master and slave modes
- Master mode speed up to $f_{\text{HCLK}}/2$
- Slave mode speed up to $f_{\text{HCLK}}/3$
- Programmable data frame length up to 16 bits
- FIFO Depth: 8 levels
- MSB or LSB first shift selection
- Programmable slave select high or low active polarity
- Multi-master and multi-slave operation
- Master mode supports the dual/quad output read mode of QSPI series NOR Flash

- Four error flags with individual interrupt
 - Read overrun
 - Write collision
 - Mode fault
 - Slave abort
- Supports PDMA interface

The Quad Serial Peripheral Interface, QSPI, provides an SPI protocol data transmit and receive functions in both master and slave modes. The QSPI interface uses 6 pins for Dual/Quad SPI, among which are serial data input and output lines SIO3, SIO2, MISO/SIO1 and MOSI/SIO0, the clock line SCK, and the slave select line SEL.

Universal Asynchronous Receiver Transmitter – UART

- Asynchronous serial communication operating baud rate clock frequency up to $f_{PCLK}/16$ MHz
- Full duplex communication
- Fully programmable serial communication characteristics including:
 - Word length: 7, 8 or 9-bit character
 - Parity: Even, odd or no-parity bit generation and detection
 - Stop bit: 1 or 2 stop bit generation
 - Bit order: LSB-first or MSB-first transfer
- Error detection: Parity, overrun and frame error

The Universal Asynchronous Receiver Transceiver, UART, provides a flexible full duplex data exchange using asynchronous transfer. The UART is used to translate data between parallel and serial interfaces, and is commonly used for RS232 standard communication. The UART peripheral function supports Line Status Interrupt. The software can detect a UART error status by reading UART Status & Interrupt Flag Register, URSIFR. The status includes the type and the condition of transfer operations as well as several error conditions resulting from Parity, Overrun, Framing and Break events.

Cyclic Redundancy Check – CRC

- Supports CRC16 polynomial: $0x8005$, $X^{16} + X^{15} + X^2 + 1$
- Supports CCITT CRC16 polynomial: $0x1021$, $X^{16} + X^{12} + X^5 + 1$
- Supports IEEE-802.3 CRC32 polynomial: $0x04C11DB7$,
 $X^{32} + X^{26} + X^{23} + X^{22} + X^{16} + X^{12} + X^{11} + X^{10} + X^8 + X^7 + X^5 + X^4 + X^2 + X + 1$
- Supports 1's complement, byte reverse & bit reverse operation on data and checksum
- Supports byte, half-word & word data size
- Programmable CRC initial seed value
- CRC computation executed in 1 AHB clock cycle for 8-bit data and 4 AHB clock cycles for 32-bit data
- Supports PDMA to complete a CRC computation of a block of memory

The CRC calculation unit is an error detection technique test algorithm which is used to verify data transmission or storage data correctness. A CRC calculation takes a data stream or a block of data as its input and generates a 16-bit or 32-bit output remainder. Ordinarily, a data stream is suffixed by a CRC code and used as a checksum when being sent or stored. Therefore, the received or restored data stream is calculated by the same generator polynomial as described above. If the new CRC code result does not match the one calculated earlier, that means the data stream contains a data error.

Peripheral Direct Memory Access – PDMA

- 6 channels with trigger source grouping
- 8-bit, 16-bit, 32-bit width data transfer
- Supports Linear address, circular address and fixed address modes
- 4-level programmable channel priority
- Auto reload mode
- Supports trigger source:
ADC, SPI, QSPI, UART, I²C, GPTM, MIDI Engine and software request

The Peripheral Direct Memory Access controller, PDMA, moves data between the peripherals and the system memory on the AHB bus. Each PDMA channel has a source address, destination address, block length and transfer count. The PDMA can exclude the CPU intervention and avoid interrupt service routine execution. It improves system performance as the software does not need to join each data movement operation.

SPI Flash Data Memory

- Full voltage range: 2.3 V ~ 3.6 V
- Serial Interface Architecture
- SPI compatible: Mode 0 and Mode 3
- 256 bytes per programmable page
- Standard, Dual or Quad SPI modes
- Low power consumption
- Uniform Sector Architecture
- Any sector or block can be erased individually
- Software and Hardware Reset
- Read Unique ID Number

The Flash data memory is a 16/32 Mbits Serial Flash memory, with advanced write protection mechanisms. The devices support the single bit and four bits serial input and output commands via standard Serial Peripheral Interface signals: Serial Clock, Chip Select, Serial DI(DQ0) and DO(DQ1), DQ2 and DQ3. The memory can be programmed 1 to 256 bytes each time, using the Page Program instruction.

The devices also offer a sophisticated method for protecting individual blocks against erroneous or malicious program and erase operations. By providing the ability to individually protect and unprotect blocks, a system can unprotect a specific block to modify its contents while keeping the remaining blocks of the memory array securely protected.

Debug Support

- Serial Wire Debug Port – SW-DP
- 4 comparators for hardware breakpoint or code / literal patch
- 2 comparators for hardware watch points

Package and Operation Temperature

- 48 / 64-pin LQFP package
- Operation temperature range: -40 °C to 85 °C

3 Overview

Device Information

Table 1. Features and Peripheral List

Peripherals		HT32F61244	HT32F61245
Main Flash (KB)		63	
Option Bytes Flash (KB)		1	
SRAM (KB)		8	
Timers	GPTM	1	
	SCTM	2	
	BFTM	2	
	LSTM	1	
	WDT	1	
Communication	QSPI	1	
	SPI	1	
	UART	1	
	I ² C	1	
PDMA		6 Channels	
CRC-16 / 32		1	
EXTI		16	
12-bit ADC		1	
Number of channels		16 Channels	
Music Synthesis Engine		16 Channels	
16-bit DAC		2 Channels	
SPI Flash Data Memory		16 Mbits	32 Mbits
GPIO		Up to 49	
CPU frequency		Up to 48 MHz	
Operating voltage		2.3 V ~ 3.6 V	
Operating temperature		-40 °C ~ 85 °C	
Package		48 / 64-pin LQFP	

Block Diagram

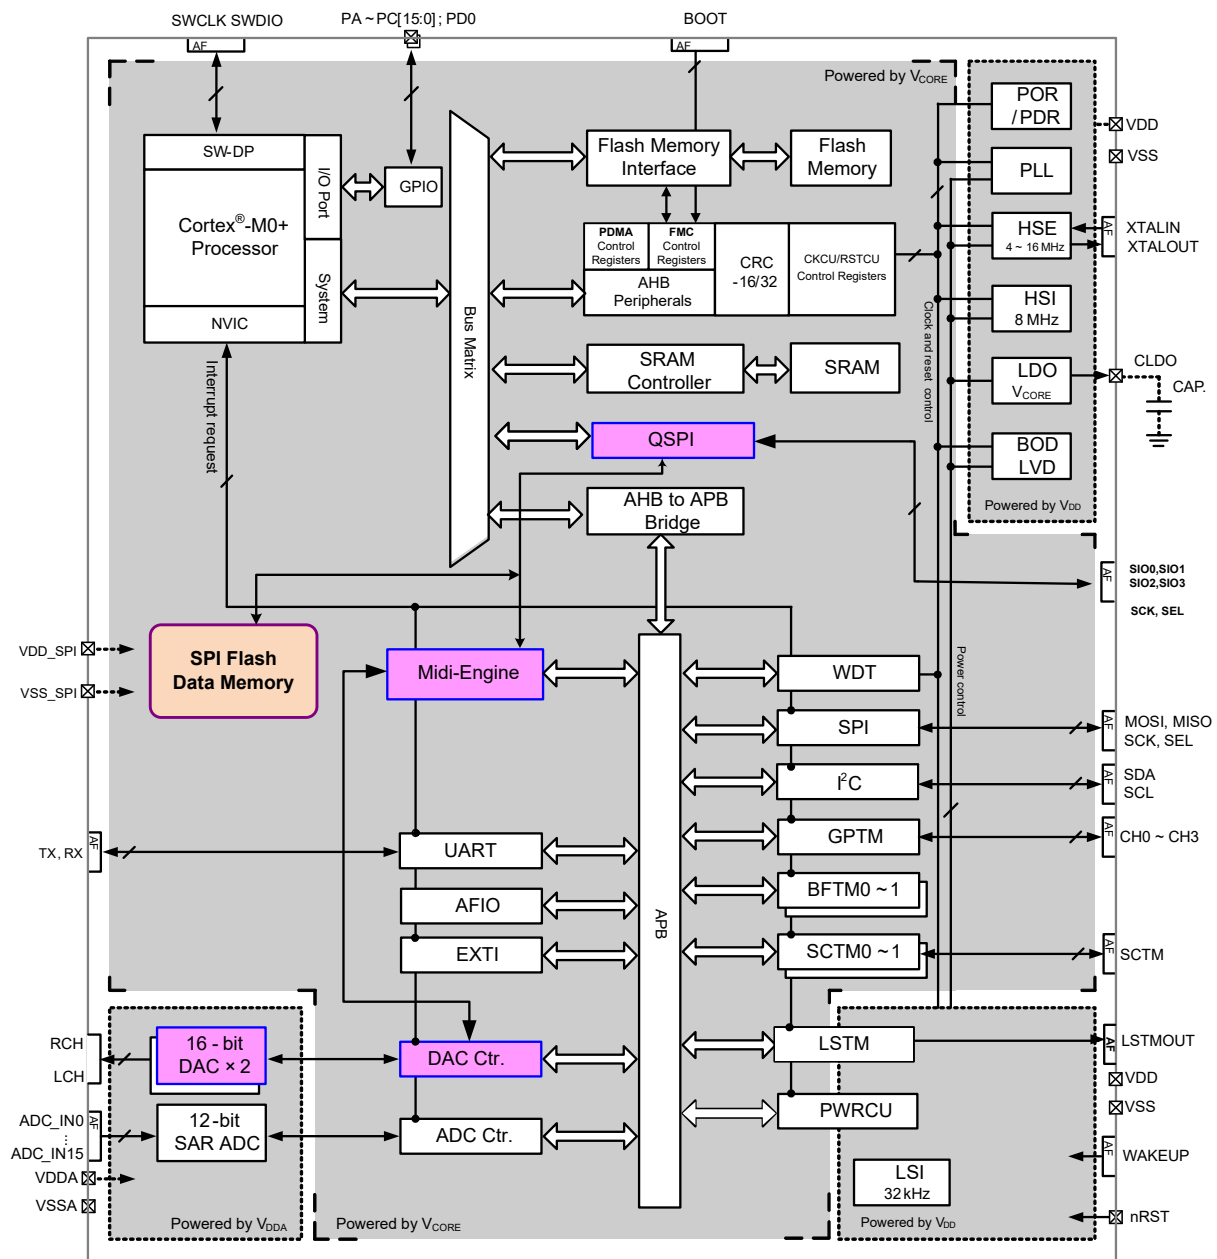


Figure 1. Block Diagram

Memory Map

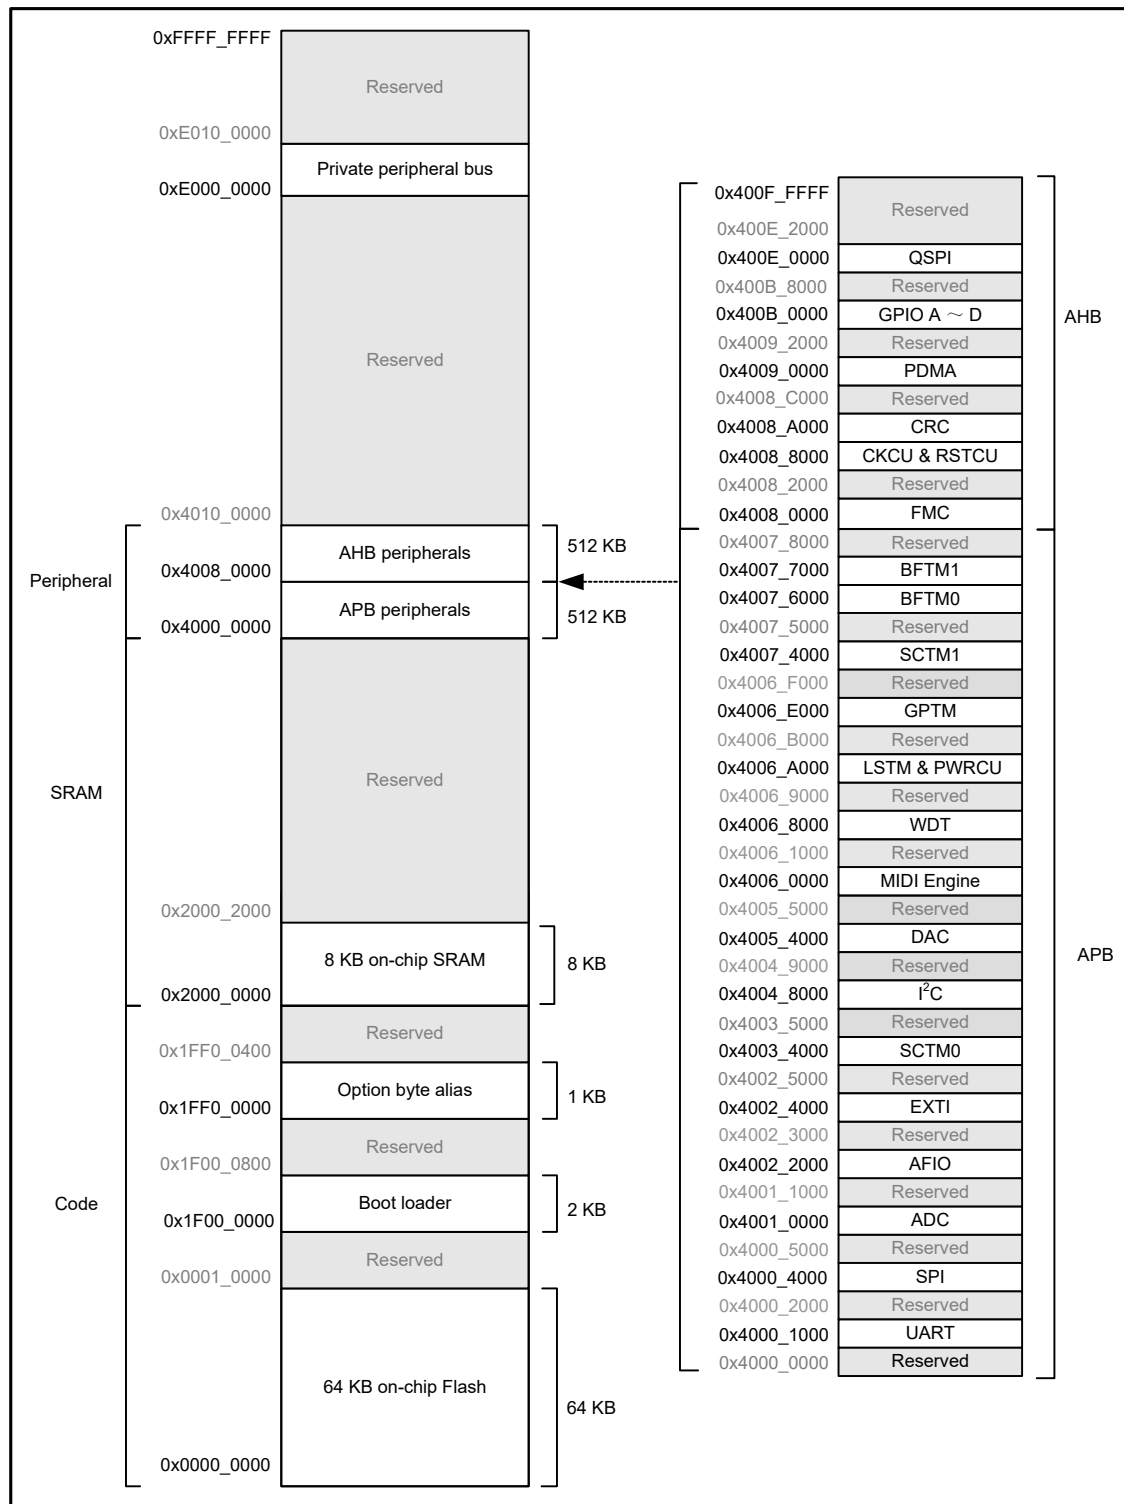



Figure 2. Memory Map

Table 2. Register Map

Start Address	End Address	Peripheral	Bus
0x4000_0000	0x4000_0FFF	Reserved	APB
0x4000_1000	0x4000_1FFF	UART	
0x4000_2000	0x4000_3FFF	Reserved	
0x4000_4000	0x4000_4FFF	SPI	
0x4000_5000	0x4000_FFFF	Reserved	
0x4001_0000	0x4001_0FFF	ADC	
0x4001_1000	0x4002_1FFF	Reserved	
0x4002_2000	0x4002_2FFF	AFIO	
0x4002_3000	0x4002_3FFF	Reserved	
0x4002_4000	0x4002_4FFF	EXTI	
0x4002_5000	0x4003_3FFF	Reserved	
0x4003_4000	0x4003_4FFF	SCTM0	
0x4003_5000	0x4004_7FFF	Reserved	
0x4004_8000	0x4004_8FFF	I ² C	
0x4004_9000	0x4005_3FFF	Reserved	
0x4005_4000	0x4005_4FFF	DAC	
0x4005_5000	0x4005_FFFF	Reserved	
0x4006_0000	0x4006_0FFF	MIDI Engine	
0x4006_1000	0x4006_7FFF	Reserved	
0x4006_8000	0x4006_8FFF	WDT	
0x4006_9000	0x4006_9FFF	Reserved	
0x4006_A000	0x4006_AFFF	LSTM & PWRCU	
0x4006_B000	0x4006_DFFF	Reserved	
0x4006_E000	0x4006_EFFF	GPTM	
0x4006_F000	0x4007_3FFF	Reserved	
0x4007_4000	0x4007_4FFF	SCTM1	
0x4007_5000	0x4007_5FFF	Reserved	
0x4007_6000	0x4007_6FFF	BFTM0	
0x4007_7000	0x4007_7FFF	BFTM1	
0x4007_8000	0x4007_FFFF	Reserved	

Start Address	End Address	Peripheral	Bus
0x4008_0000	0x4008_1FFF	FMC	AHB
0x4008_2000	0x4008_7FFF	Reserved	
0x4008_8000	0x4008_9FFF	CKCU & RSTCU	
0x4008_A000	0x4008_BFFF	CRC	
0x4008_C000	0x4008_FFFF	Reserved	
0x4009_0000	0x4009_1FFF	PDMA	
0x4009_2000	0x400A_FFFF	Reserved	
0x400B_0000	0x400B_1FFF	GPIOA	
0x400B_2000	0x400B_3FFF	GPIOB	
0x400B_4000	0x400B_5FFF	GPIOC	
0x400B_6000	0x400B_7FFF	GPIOD	
0x400B_8000	0x400D_FFFF	Reserved	
0x400E_0000	0x400E_1FFF	QSPI	
0x400E_2000	0x400F_FFFF	Reserved	

Clock Structure

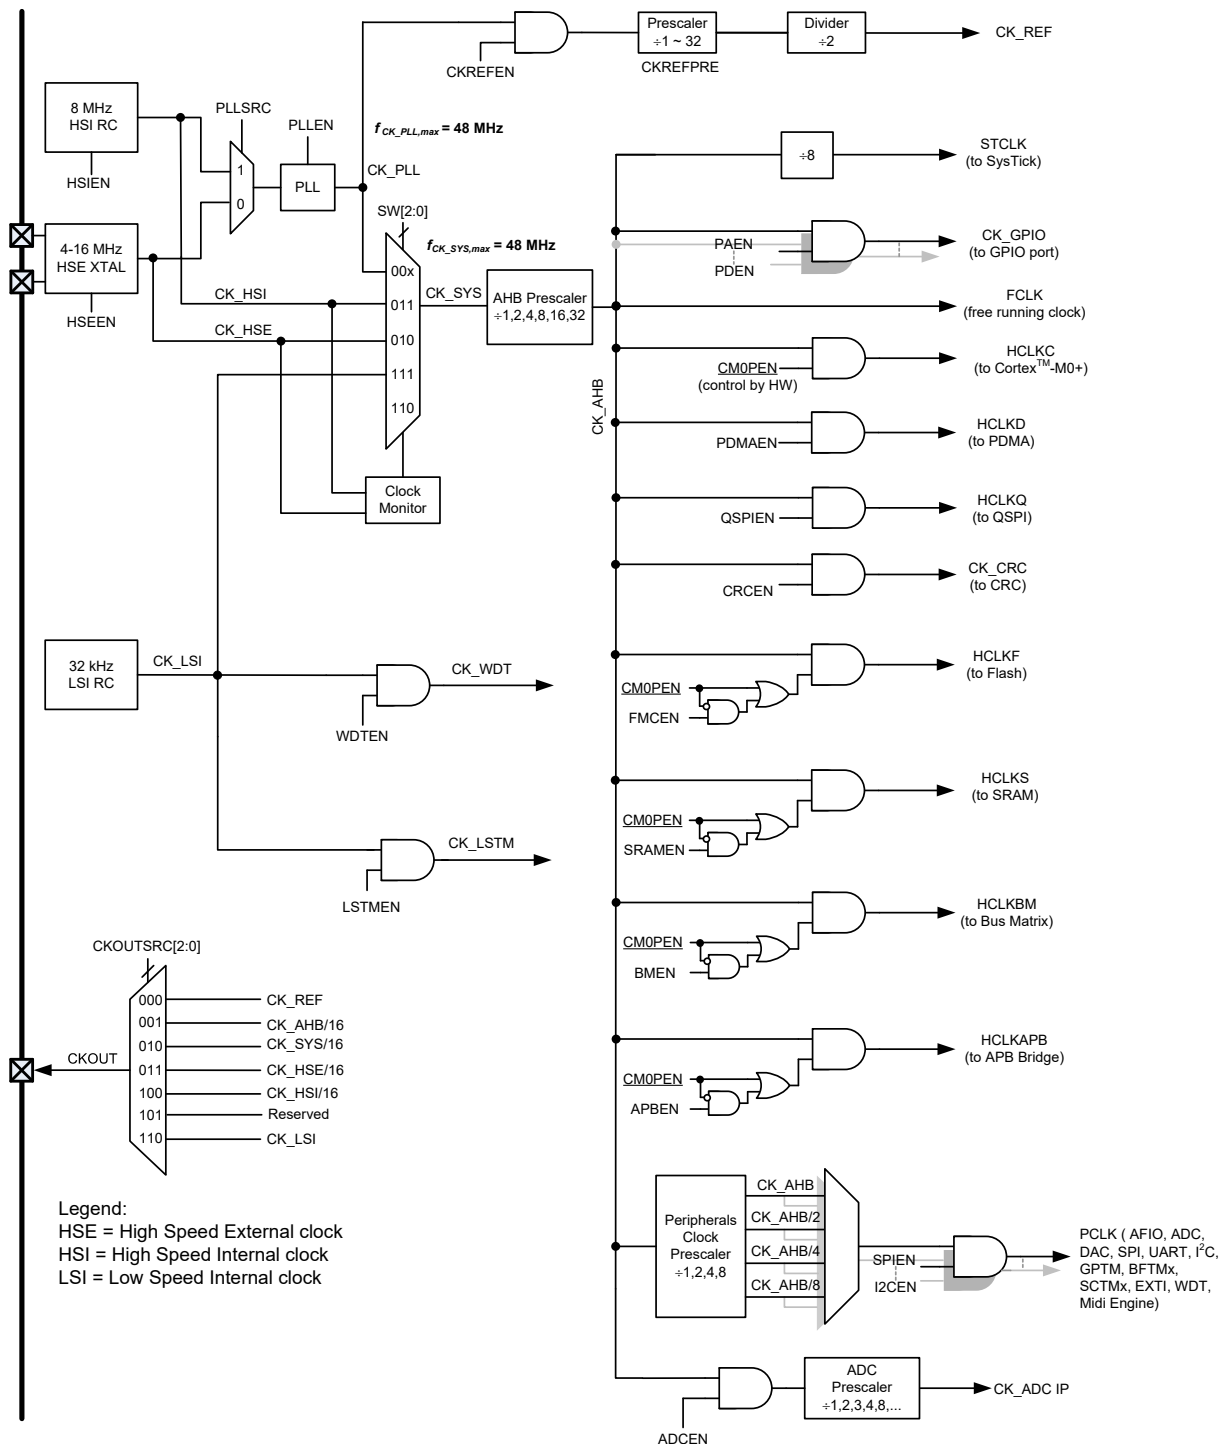


4 SPI Flash Data Memory

The SPI Flash Data Memory is the location where the user's music data is stored. By using the Holtek Audio Workshop tool, these devices offer users the flexibility to conveniently change and develop their applications while also offering a means of field programming.


The SPI Flash data memory supports the single bit and four bits serial input and output commands via standard Serial Peripheral Interface (SPI) signals: Serial Clock, Chip Select, Serial DI(DQ0) and DO(DQ1), DQ2 and DQ3.

The internal Flash Data Memory within the devices has a capacity of 16 / 32 Mbits respectively and can be programmed 1 to 256 bytes each time, using the Page Program instruction.

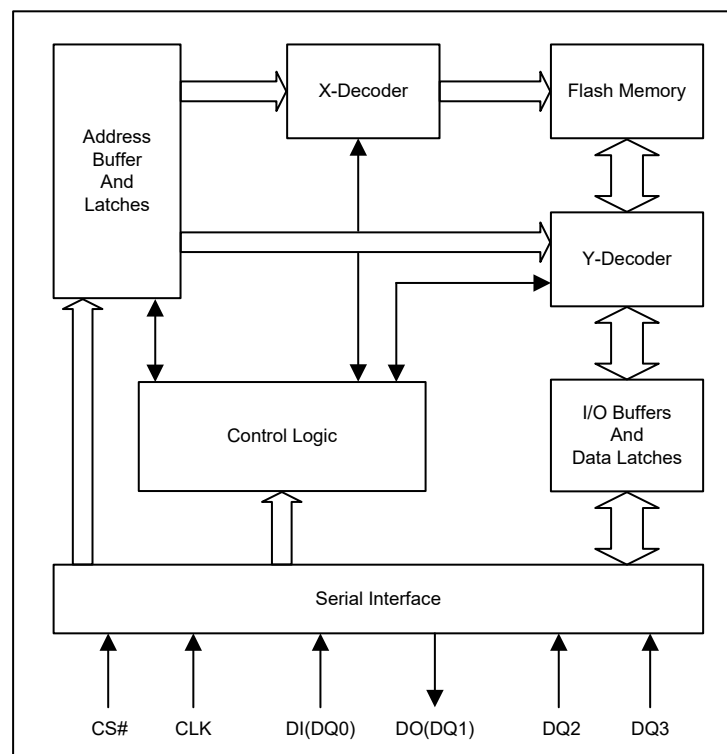


Standard SPI Mode

The Flash data memory is accessed through an SPI compatible bus consisting of four signals: Serial Clock (CLK), Chip Select (CS#), Serial Data Input (DI) and Serial Data Output (DO). Both SPI bus operation Modes 0 (0, 0) and 3 (1, 1) are supported. The primary difference between Mode 0 and Mode 3, as shown in the following figure, concerns the normal state of the CLK signal when the SPI bus master is in standby state and data is not being transferred to the Serial Flash. For Mode 0, the CLK signal is normally low. For Mode 3 the CLK signal is normally high. In either case, data input on the DI line is sampled on the rising edge of CLK. Data output on the DO line is clocked out on the falling edge of CLK.

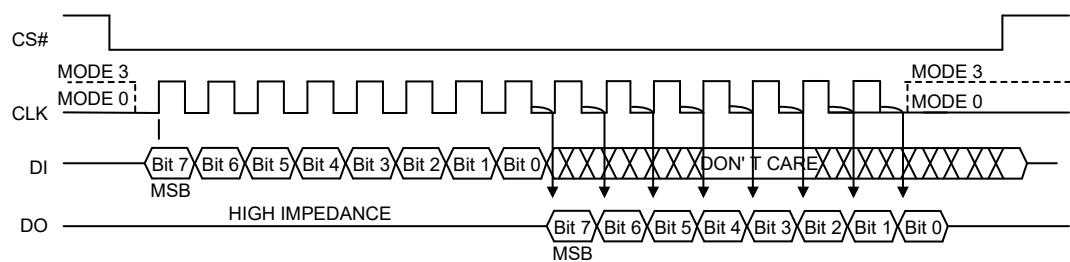

Quad I/O SPI Mode

The Flash Memory supports Quad input/output operation when using the Quad I/O Fast Read (EBh) instruction. This instruction allows data to be transferred to or from the Serial Flash memory at four to six times the rate possible with the standard SPI. When using Quad SPI instruction the DI and DO lines become bidirectional I/O lines DQ0 and DQ1, and DQ2 and DQ3 are also used.

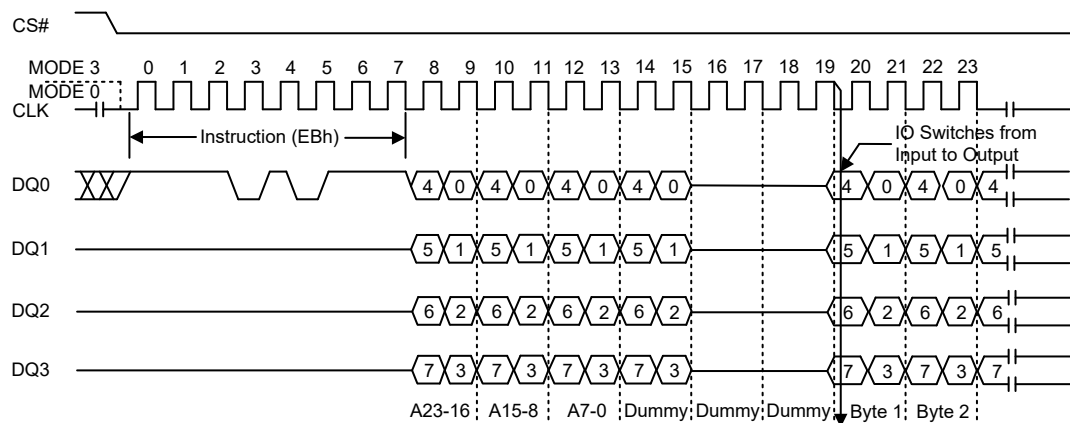

4 SPI Flash Data Memory

The instruction sequence is shown in following figure. The first byte to be addressed can be at any location. The address is automatically incremented to the next higher address after each byte of data is shifted out. The whole memory can, therefore, be read with a single Read Data Bytes at Higher Speed (FAST_READ) instruction. When the highest address is reached, the address counter rolls over to 000000h, allowing the read sequence to be continued indefinitely.


Timing diagram for the 24-bit address phase of the 28C64. The diagram shows CS# (chip select) active low, CLK (clock) with a 10MHz frequency, DI (data input) with a 10MHz frequency, and DO (data output) active low. The address phase is divided into two parts: a 24-bit address (0 to 31) and a 24-bit data output (0 to 31). The address is 0Bh (00001011). The data output is 0Bh (00001011). The diagram also shows the 24-bit address phase for the 28C64, which is 0Bh (00001011). The diagram is labeled '28C64' and '24-Bit Address'.

Quad Input / Output FAST_READ (EBh)

For the Quad Input/Output FAST_READ (EBh) instruction, the address and data bits are input and output through four lines, DQ0, DQ1, DQ2 and DQ3 and six dummy clocks are required prior to the data output. The Quad I/O dramatically reduces instruction overhead allowing faster random access for code execution (XIP) directly from the Quad SPI.

The Quad Input/Output FAST_READ (EBh) instruction enables quad throughput of Serial Flash in read mode. The address is latched on the rising edge of CLK, and data of every four bits (interleave on 4 I/O lines) is shifted out on the falling edge of CLK. The first address can be any location. The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out with a single Quad Input/Output FAST_READ instruction. The address counter rolls over to 000000h when the highest address has been reached. Once writing Quad Input/Output FAST_READ instruction, the following address/dummy/data out will be performed as 4-bit instead of previous 1-bit.

The sequence of issuing Quad Input/Output FAST_READ (EBh) instruction is: CS# goes low ⇒ send Quad Input/Output FAST_READ (EBh) instruction ⇒ 24-bit address interleave on DQ3, DQ2, DQ1 and DQ0 ⇒ 6 dummy clocks ⇒ data out interleave on DQ3, DQ2, DQ1 and DQ0 ⇒ drive CS# to High at any time during data out to end Quad Input/Output FAST_READ (EBh) operation, as shown in the following figure.

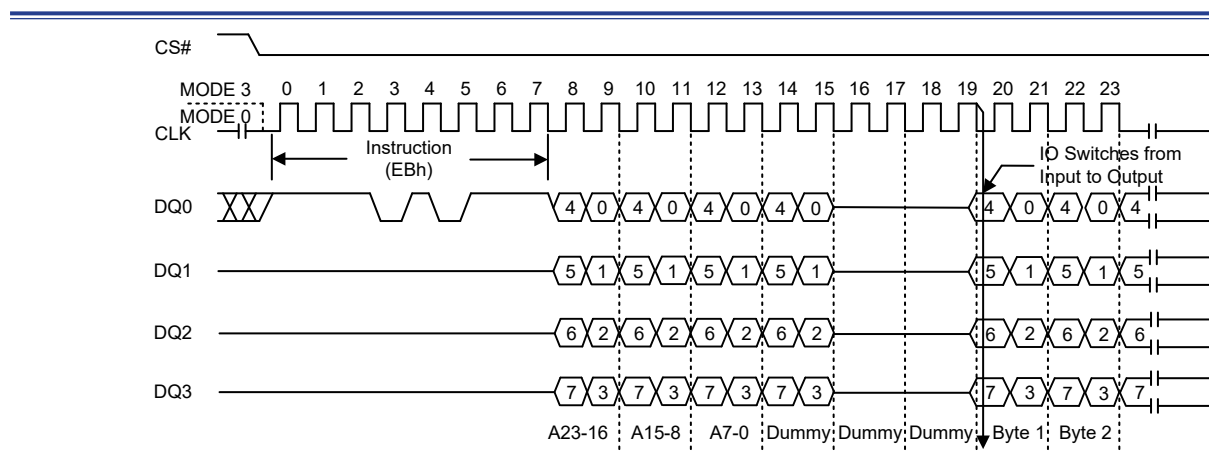

5 Pin Assignment

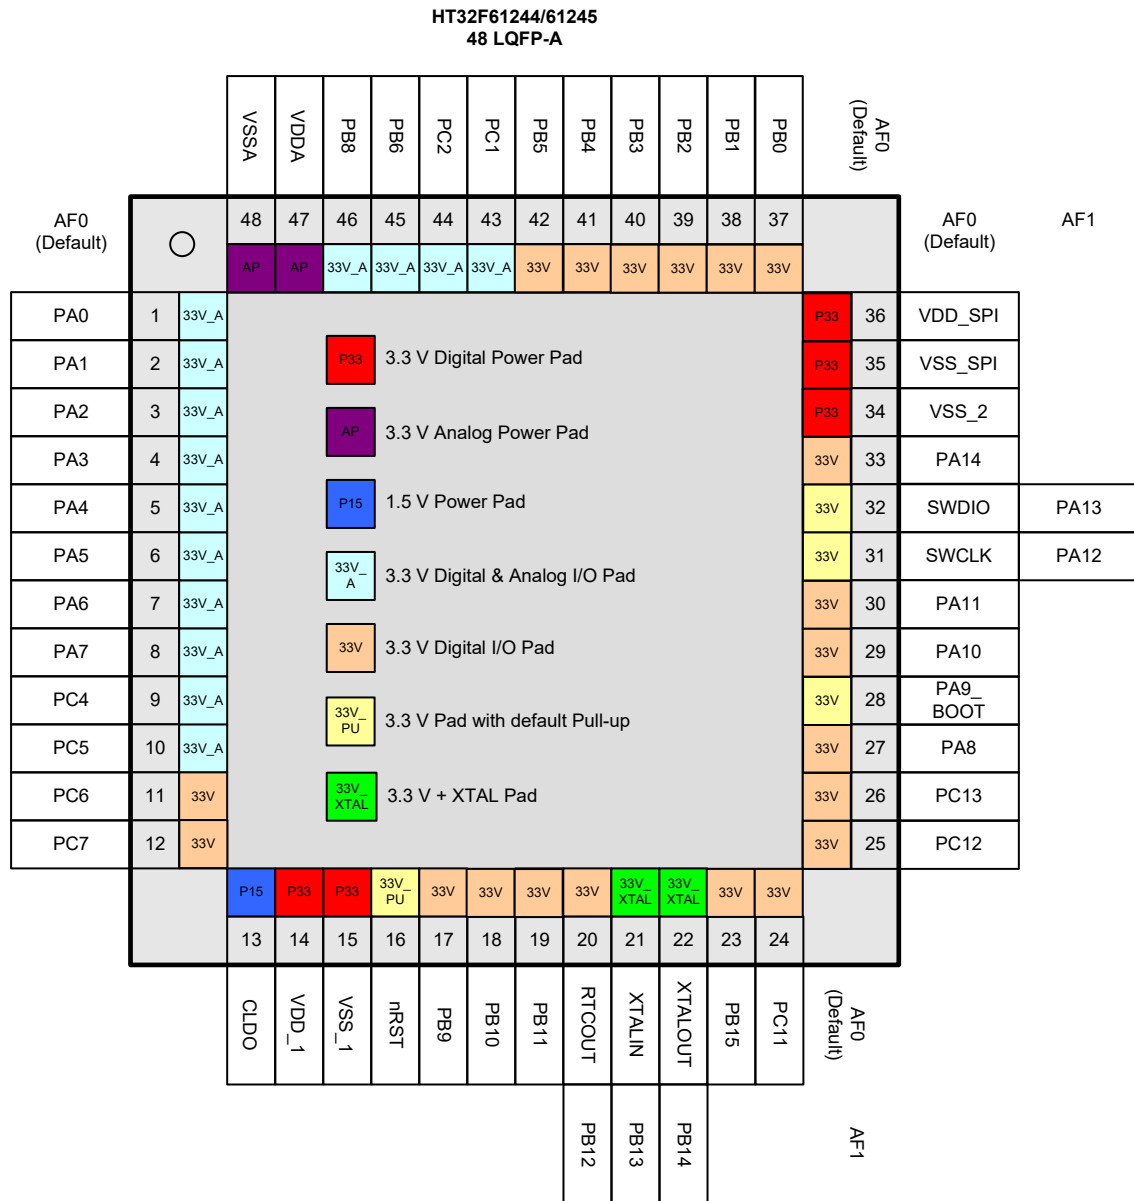


Figure 4. 48-pin LQFP Pin Assignment

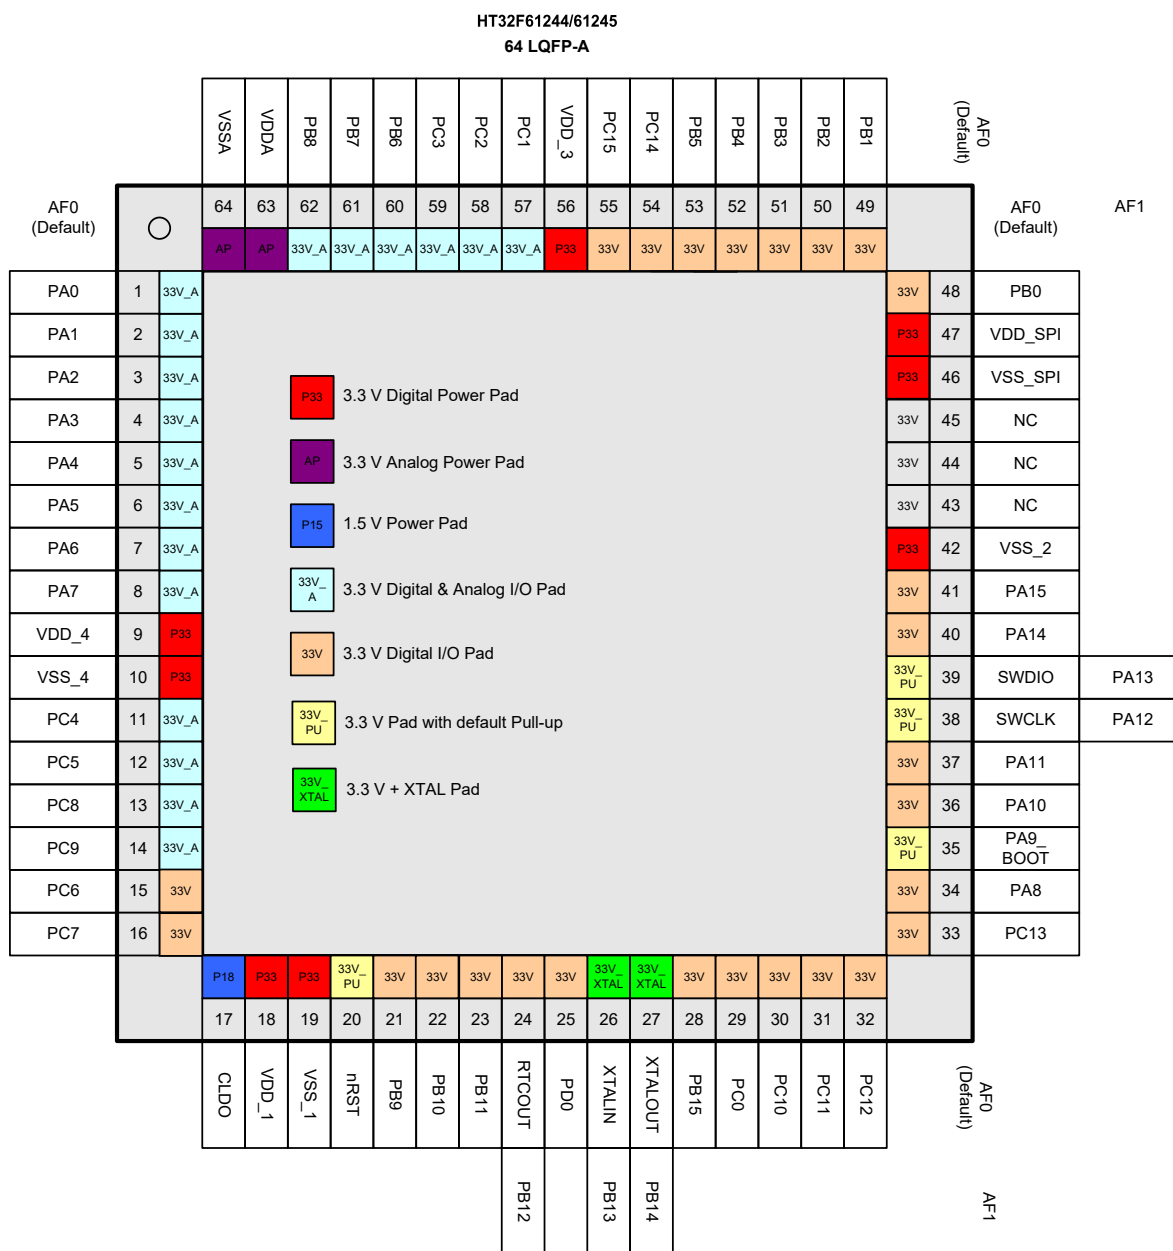


Figure 5. 64-pin LQFP Pin Assignment

Table 3. 48/64-pin LQFP Package

Package		Alternate Function Number															
		AF0	AF1	AF2	AF3	AF4	AF5	AF6	AF7	AF8	AF9	AF10	AF11	AF12	AF13	AF14	AF15
64 LQFP	48 LQFP	System Default	GPIO	ADC/DAC	N/A	GPTM	SPI/QSPI	UART	I ² C	N/A	N/A	N/A	N/A	N/A	SCTM	N/A	System Other
1	1	PA0		ADC_IN4			QSPI_SCK										
2	2	PA1		ADC_IN5			QSPI_SIO0										
3	3	PA2		ADC_IN6			QSPI_SIO1										
4	4	PA3		ADC_IN7			QSPI_SEL										
5	5	PA4		ADC_IN8		GT_CH0	SPI_SCK		I2C_SCL								
6	6	PA5		ADC_IN9		GT_CH1	SPI_MOSI		I2C_SDA								
7	7	PA6		ADC_IN10		GT_CH2	SPI_MISO										
8	8	PA7		ADC_IN11		GT_CH3	SPI_SEL										
9	—	VDD_4															
10	—	VSS_4															
11	9	PC4		ADC_IN12		GT_CH0	QSPI_SIO2	UR_TX							SCTM0		
12	10	PC5		ADC_IN13		GT_CH1	QSPI_SIO3	UR_RX							SCTM1		
13	—	PC8		ADC_IN14		GT_CH2											
14	—	PC9		ADC_IN15		GT_CH3											
15	11	PC6							I2C_SCL								
16	12	PC7							I2C_SDA								
17	13	CLDO															
18	14	VDD_1															
19	15	VSS_1															
20	16	nRST															
21	17	PB9					QSPI_SIO2										
22	18	PB10															
23	19	PB11															
24	20	LSTMOUT	PB12												SCTM0		WAKEUP
25	—	PD0					QSPI_SIO3		I2C_SDA								
26	21	XTALIN	PB13														
27	22	XTALOUT	PB14														
28	23	PB15					SPI_SEL										
29	—	PC0					SPI_SCK										
30	—	PC10					QSPI_SEL										
31	24	PC11					QSPI_SCK										
32	25	PC12					QSPI_SIO0		I2C_SCL								
33	26	PC13					QSPI_SIO1		I2C_SDA								
34	27	PA8					QSPI_SIO2										
35	28	PA9_BOOT					SPI_MOSI										CKOUT
36	29	PA10					QSPI_SIO3										
37	30	PA11					SPI_MISO								SCTM0		
38	31	SWCLK	PA12														
39	32	SWDIO	PA13														
40	33	PA14					QSPI_SEL										
41	—	PA15					QSPI_SCK								SCTM1		
42	34	VSS_2															
43 ~ 45		—	NC														
46	35	VSS_SPI															
47	36	VDD_SPI															
48	37	PB0					QSPI_SIO0		I2C_SCL								
49	38	PB1					QSPI_SIO1		I2C_SDA								
50	39	PB2					SPI_SEL	UR_TX									
51	40	PB3					SPI_SCK	UR_RX							SCTM1		
52	41	PB4					SPI_MOSI								SCTM0		
53	42	PB5					SPI_MISO										
54	—	PC14							I2C_SCL								

Package		Alternate Function Number															
		AF0	AF1	AF2	AF3	AF4	AF5	AF6	AF7	AF8	AF9	AF10	AF11	AF12	AF13	AF14	AF15
64 LQFP	48 LQFP	System Default	GPIO	ADC/DAC	N/A	GPTM	SPI/QSPI	UART	I ² C	N/A	N/A	N/A	N/A	N/A	SCTM	N/A	System Other
55	—	PC15							I2C_SDA								
56	—	VDD_3															
57	43	PC1		DAC_RCH			QSPI_SEL										
58	44	PC2		DAC_LCH			QSPI_SCK										
59	—	PC3		ADC_IN0			QSPI_SIO0										
60	45	PB6		ADC_IN1			QSPI_SIO1	UR_TX									
61	—	PB7		ADC_IN2			QSPI_SIO2										
62	46	PB8		ADC_IN3			QSPI_SIO3	UR_RX									
63	47	VDDA															
64	48	VSSA															

Table 4. Pin Description

Pin Number		Pin Name	Type ⁽¹⁾	I/O Structure ⁽²⁾	Output Driving	Description
64LQFP	48LQFP					Default Function (AF0)
1	1	PA0	AI/O	33V	4/8/12/16 mA	PA0
2	2	PA1	AI/O	33V	4/8/12/16 mA	PA1
3	3	PA2	AI/O	33V	4/8/12/16 mA	PA2
4	4	PA3	AI/O	33V	4/8/12/16 mA	PA3
5	5	PA4	AI/O	33V	4/8/12/16 mA	PA4
6	6	PA5	AI/O	33V	4/8/12/16 mA	PA5
7	7	PA6	AI/O	33V	4/8/12/16 mA	PA6
8	8	PA7	AI/O	33V	4/8/12/16 mA	PA7
9	—	VDD_4	P	—	—	Voltage for digital I/O
10	—	VSS_4	P	—	—	Ground reference for digital I/O
11	9	PC4	AI/O	33V	4/8/12/16 mA	PC4
12	10	PC5	AI/O	33V	4/8/12/16 mA	PC5
13	—	PC8	AI/O	33V	4/8/12/16 mA	PC8
14	—	PC9	AI/O	33V	4/8/12/16 mA	PC9
15	11	PC6	I/O	33V	4/8/12/16 mA	PC6
16	12	PC7	I/O	33V	4/8/12/16 mA	PC7
17	13	CLDO	P	—	—	Core power LDO V _{CORE} output. A 2.2 μF capacitor must be connected as close as possible between this pin and VSS_1.
18	14	VDD_1	P	—	—	Voltage for digital I/O
19	15	VSS_1	P	—	—	Ground reference for digital I/O
20	16	nRST	I	33V_PU	—	External reset pin and external wakeup pin in the Power-Down mode
21	17	PB9	I/O	33V	4/8/12/16 mA	PB9
22	18	PB10	I/O	33V	4/8/12/16 mA	PB10
23	19	PB11	I/O	33V	4/8/12/16 mA	PB11
24	20	PB12	I/O	33V	4/8/12/16 mA	PB12
25	—	PD0	I/O	33V	4/8/12/16 mA	PD0
26	21	PB13	AI/O	33V	4/8/12/16 mA	XTALIN

Pin Number		Pin Name	Type ⁽¹⁾	I/O Structure ⁽²⁾	Output Driving	Description
64LQFP	48LQFP					Default Function (AF0)
27	22	PB14	AI/O	33V	4/8/12/16 mA	XTALOUT
28	23	PB15	I/O	33V	4/8/12/16 mA	PB15
29	—	PC0	I/O	33V	4/8/12/16 mA	PC0
30	—	PC10	I/O	33V	4/8/12/16 mA	PC10
31	24	PC11	I/O	33V	4/8/12/16 mA	PC11
32	25	PC12	I/O	33V	4/8/12/16 mA	PC12
33	26	PC13	I/O	33V	4/8/12/16 mA	PC13
34	27	PA8	I/O	33V	4/8/12/16 mA	PA8
35	28	PA9	I/O	33V_PU	4/8/12/16 mA	PA9_BOOT
36	29	PA10	I/O	33V	4/8/12/16 mA	PA10
37	30	PA11	I/O	33V	4/8/12/16 mA	PA11
38	31	PA12	I/O	33V_PU	4/8/12/16 mA	SWCLK
39	32	PA13	I/O	33V_PU	4/8/12/16 mA	SWDIO
40	33	PA14	I/O	33V	4/8/12/16 mA	PA14
41	—	PA15	I/O	33V	4/8/12/16 mA	PA15
42	34	VSS_2	P	—	—	Ground reference for digital I/O
43 ~ 45	—	NC	—	—	—	No connected
46	35	VSS_SPI	—	33V	—	SPI Flash Data Memory Ground reference
47	36	VDD_SPI	—	33V	—	SPI Flash Data Memory Power
48	37	PB0	I/O	33V	4/8/12/16 mA	PB0
49	38	PB1	I/O	33V	4/8/12/16 mA	PB1
50	39	PB2	I/O	33V	4/8/12/16 mA	PB2
51	40	PB3	I/O	33V	4/8/12/16 mA	PB3
52	41	PB4	I/O	33V	4/8/12/16 mA	PB4
53	42	PB5	I/O	33V	4/8/12/16 mA	PB5
54	—	PC14	I/O	33V	4/8/12/16 mA	PC14
55	—	PC15	I/O	33V	4/8/12/16 mA	PC15
56	—	VDD_3	P	—	—	Voltage for digital I/O
57	43	PC1	AI/O	33V	4/8/12/16 mA	PC1
58	44	PC2	AI/O	33V	4/8/12/16 mA	PC2
59	—	PC3	AI/O	33V	4/8/12/16 mA	PC3
60	45	PB6	AI/O	33V	4/8/12/16 mA	PB6
61	—	PB7	AI/O	33V	4/8/12/16 mA	PB7
62	46	PB8	AI/O	33V	4/8/12/16 mA	PB8
63	47	VDDA	P	—	—	Analog voltage for ADC and DAC
64	48	VSSA	P	—	—	Ground reference for the ADC and DAC

Note: 1. I = input, O = output, A = Analog port, P = power supply, PU = pull-up.

2. 33V = 3.3 V tolerant.

3. The GPIOs are in an AF0 state after a V_{CORE} power on reset (POR).

Internal Connection Signals

The SPI Flash data memory supports the single bit and four bits serial input and output commands via standard Serial Peripheral Interface signals: Serial Clock, Chip Select, Serial DI (DQ0) and DO (DQ1), DQ2 and DQ3. These signals have been internally connected to the QSPI peripheral. The connections are listed in the following table and the related control registers should be configured correctly using application program.


Table 5. Internal Connection Signal Lines

QSPI Peripheral Signal Name	Connected Standard Serial Peripheral Interface Signal Name	Description
PD6 / QSPI_D0	DI (DQ0)	SPI Flash data memory serial data input (data input / output 0) ⁽¹⁾ . The MCU AFIO setting should be AF5 to select the QSPI pin function.
PD5 / QSPI_SCK	CLK	SPI Flash data memory serial clock input. The MCU AFIO setting should be AF5 to select the QSPI pin function.
PD4 / QSPI_D3	DQ3	SPI Flash data memory data input / output 3 ⁽²⁾ . The MCU AFIO setting should be AF5 to select the QSPI pin function.
PD3 / QSPI_D2	DQ2	SPI Flash data memory data input / output 2 ⁽²⁾ . The MCU AFIO setting should be AF5 to select the QSPI pin function.
PD2 / QSPI_D1	DO (DQ1)	SPI Flash data memory data output (data input / output 1) ⁽¹⁾ . The MCU AFIO setting should be AF5 to select the QSPI pin function.
PD1 / QSPI_SCSB	CS#	SPI Flash data memory chip select. The MCU AFIO setting should be AF5 to select the QSPI pin function.

Note: 1. DQ0 and DQ1 are used for Standard SPI and Quad I/O SPI modes.

2. DQ0 ~ DQ3 are used for Quad I/O SPI mode.

6 Application Circuits

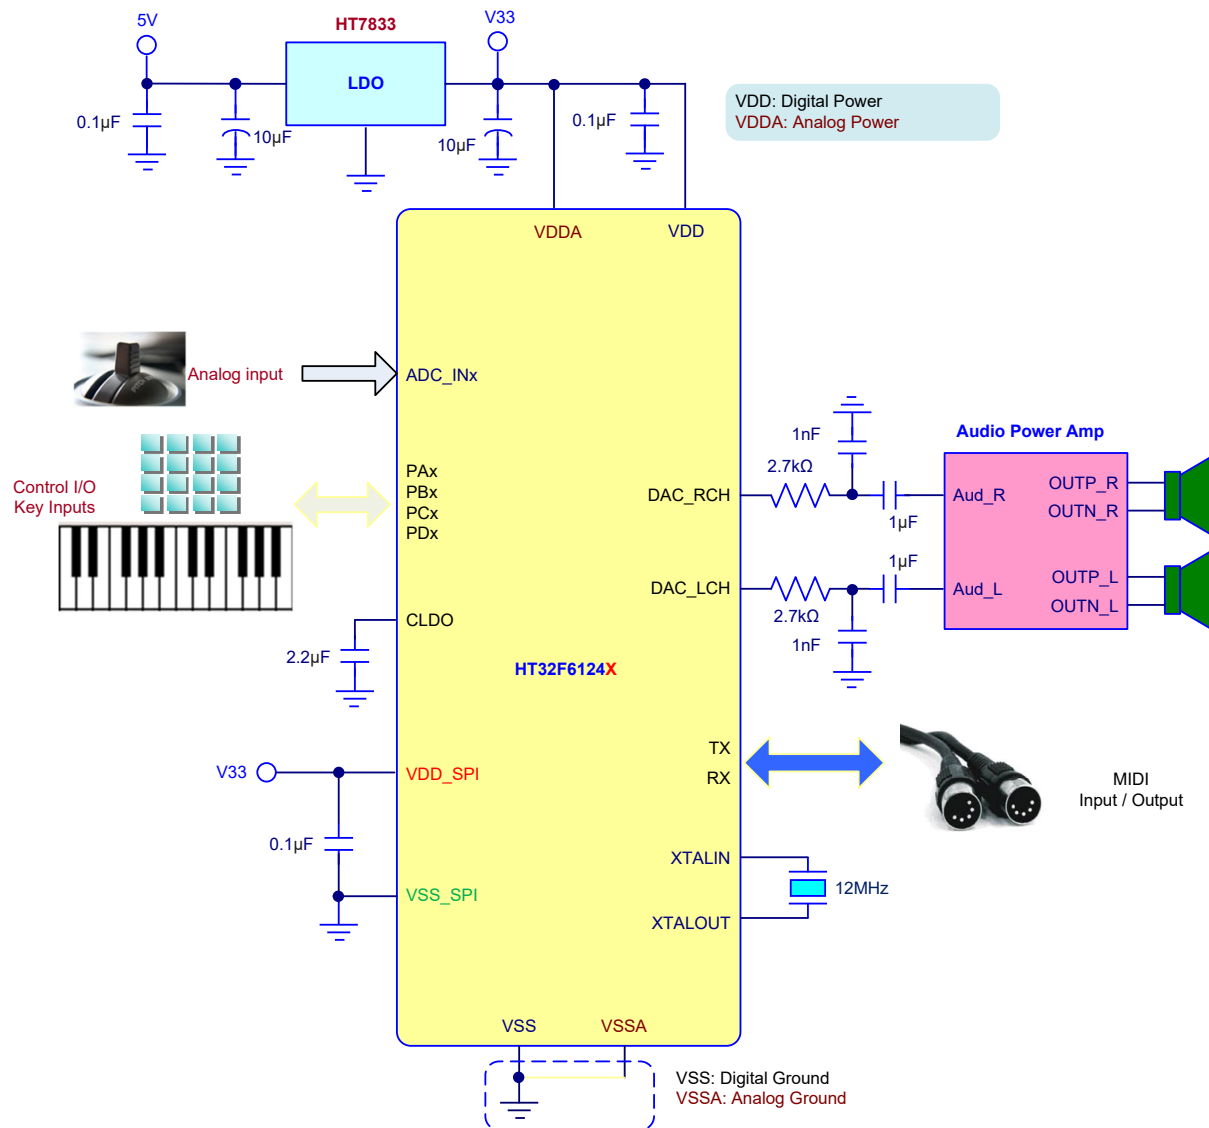

7 Electrical Characteristics

Absolute Maximum Ratings

The following table shows the absolute maximum ratings of the devices. These are stress ratings only. Stresses beyond absolute maximum ratings may cause permanent damage to the devices. Note that the devices are not guaranteed to operate properly at the maximum ratings. Exposure to the absolute maximum rating conditions for extended periods may affect device reliability.

Table 6. Absolute Maximum Ratings

Symbol	Parameter	Min.	Max.	Unit
V _{DD}	External Main Supply Voltage	V _{SS} - 0.3	V _{SS} + 3.6	V
V _{DDA}	External Analog Supply Voltage	V _{SSA} - 0.3	V _{SSA} + 3.6	V
V _{IN}	Input Voltage on I/O	V _{SS} - 0.3	V _{DD} + 0.3	V
T _A	Ambient Operating Temperature Range	-40	85	°C
T _{STG}	Storage Temperature Range	-60	150	°C
T _J	Maximum Junction Temperature	—	125	°C
P _D	Total Power Dissipation	—	500	mW
V _{ESD}	Electrostatic Discharge Voltage – Human Body Mode	-4000	4000	V

Recommended DC Operating Conditions

Table 7. Recommended DC Operating Conditions

T_A = 25 °C, unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V _{DD}	I/O Operating Voltage	—	2.3	3.3	3.6	V
V _{DDA}	Analog Operating Voltage	—	2.5	3.3	3.6	V

On-Chip LDO Voltage Regulator Characteristics

Table 8. LDO Characteristics

T_A = 25 °C, unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V _{LDO}	Internal Regulator Output Voltage	V _{DD} ≥ 2.0 V Regulator input @ I _{LDO} = 35 mA and voltage variation = ±5 %, After trimming.	1.425	1.5	1.57	V
I _{LDO}	Output Current	V _{DD} = 2.0 V Regulator input @ V _{LDO} = 1.5 V	—	30	35	mA
C _{LDO}	External Filter Capacitor Value for Internal Core Power Supply	The capacitor value is dependent on the core power current consumption	—	2.2	—	μF

Power Consumption

Table 9. Power Consumption Characteristics

$T_A = 25\text{ }^{\circ}\text{C}$, unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_{DD}	Supply Current (Run Mode)	$V_{DD} = 3.3\text{ V}$, HSE = 8 MHz, PLL = 48 MHz, $f_{HCLK} = 48\text{ MHz}$, $f_{PCLK} = 48\text{ MHz}$, All peripherals enabled	—	13.81	—	mA
		$V_{DD} = 3.3\text{ V}$, HSE = 8 MHz, PLL = 48 MHz, $f_{HCLK} = 48\text{ MHz}$, $f_{PCLK} = 48\text{ MHz}$, All peripherals disabled	—	6.12	—	
		$V_{DD} = 3.3\text{ V}$, HSE off, PLL off, LSI on, $f_{HCLK} = 32\text{ kHz}$, $f_{PCLK} = 32\text{ kHz}$, All peripherals enabled	—	2.75	—	mA
		$V_{DD} = 3.3\text{ V}$, HSE off, PLL off, LSI on, $f_{HCLK} = 32\text{ kHz}$, $f_{PCLK} = 32\text{ kHz}$, All peripherals disabled	—	20	—	μA
	Supply Current (Sleep Mode)	$V_{DD} = 3.3\text{ V}$, HSE = 8 MHz, PLL = 48 MHz, $f_{HCLK} = 0\text{ MHz}$, $f_{PCLK} = 48\text{ MHz}$, All peripherals enabled	—	9.76	—	mA
		$V_{DD} = 3.3\text{ V}$, HSE = 8 MHz, PLL = 48 MHz, $f_{HCLK} = 0\text{ MHz}$, $f_{PCLK} = 48\text{ MHz}$, All peripherals disabled	—	1.47	—	
	Supply Current (Deep-Sleep1 Mode)	$V_{DD} = 3.3\text{ V}$, All clock off (HSE / PLL / f_{HCLK}), LDO in low power mode, LSI on	—	15.87	—	μA
	Supply Current (Deep-Sleep2 Mode)	$V_{DD} = 3.3\text{ V}$, All clock off (HSE / PLL / f_{HCLK}), LDO off, DMOS on, LSI on	—	4.11	—	μA
	Supply Current (Power-Down Mode)	$V_{DD} = 3.3\text{ V}$, LDO off, DMOS off, LSI on	—	1.23	—	μA

Note: 1. HSE means high speed external oscillator. HSI means 8 MHz high speed internal oscillator.
2. LSI means 32 kHz low speed internal oscillator.
3. Code = while (1) {208 NOP} executed in Flash.

Reset and Supply Monitor Characteristics

Table 10. V_{DD} Power Reset Characteristics

T_A = 25 °C, unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V _{POR}	Power-on Reset Threshold (Rising Voltage on V _{DD})	T _A = -40 °C ~ 85 °C	1.66	1.79	1.90	V
V _{PDR}	Power-down Reset Threshold (Falling Voltage on V _{DD})		1.49	1.64	1.78	V
V _{PORHYST}	POR Hysteresis	—	—	150	—	mV
t _{POR}	Reset Delay Time	V _{DD} = 3.3 V	—	0.1	0.2	ms

Note: 1. Data based on characterization results only, not tested in production.
2. If the LDO is turned on, the V_{DD} POR has to be in the de-assertion condition. When the V_{DD} POR is in the assertion state then the LDO will be turned off.

Table 11. LVD/BOD Characteristics

T_A = 25 °C, unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V _{BOD}	Voltage of Brown Out Detection	T _A = -40 °C ~ 85 °C After factory-trimmed (V _{DD} Falling edge)	2.02	2.1	2.18	V
V _{LVD}	Voltage of Low Voltage Detection	T _A = -40 °C ~ 85 °C (V _{DD} Falling edge)	LVDS = 000	2.17	2.25	2.33
			LVDS = 001	2.32	2.4	2.48
			LVDS = 010	2.47	2.55	2.63
			LVDS = 011	2.62	2.7	2.78
			LVDS = 100	2.77	2.85	2.93
			LVDS = 101	2.92	3.0	3.08
			LVDS = 110	3.07	3.15	3.23
			LVDS = 111	3.22	3.3	3.38
V _{LVDHTST}	LVD Hysteresis	V _{DD} = 3.3 V	—	—	100	mV
t _{suLVD}	LVD Setup Time	V _{DD} = 3.3 V	—	—	5	μs
t _{aiLVD}	LVD Active Delay Time	V _{DD} = 3.3 V	—	—	—	μs
I _{DDLVD}	Operation Current ⁽²⁾	V _{DD} = 3.3 V	—	—	5	μA

Note: 1. Data based on characterization results only, not tested in production.
2. Bandgap current is not included.
3. LVDS field is in the PWRCU LVDCSR register

External Clock Characteristics

Table 12. High Speed External Clock (HSE) Characteristics

$T_A = 25\text{ }^{\circ}\text{C}$, unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V_{DD}	Operation Range	—	2.0	—	3.6	V
f_{HSE}	High Speed External Oscillator Frequency (HSE)	—	4	—	16	MHz
C_L	Load Capacitance	$V_{DD} = 3.3\text{ V}$, $R_{ESR} = 100\text{ }\Omega$ @ 16 MHz	—	—	22	pF
R_{FHSE}	Internal Feedback Resistor between XTALIN and XTALOUT Pins	—	—	1	—	M Ω
R_{ESR}	Equivalent Series Resistance	$V_{DD} = 3.3\text{ V}$, $C_L = 12\text{ pF}$ @ 16 MHz, HSEDR = 0	—	—	160	Ω
		$V_{DD} = 2.4\text{ V}$, $C_L = 12\text{ pF}$ @ 16 MHz, HSEDR = 1				
D_{HSE}	HSE Oscillator Duty cycle	—	40	—	60	%
I_{DDHSE}	HSE Oscillator Current Consumption	$V_{DD} = 3.3\text{ V}$ @ 16 MHz	—	TBD	—	mA
I_{PWDHSE}	HSE Oscillator Power Down Current	$V_{DD} = 3.3\text{ V}$	—	—	0.01	μA
t_{SUHSE}	HSE Oscillator Startup Time	$V_{DD} = 3.3\text{ V}$	—	—	4	ms

Note: The following guidelines are recommended to increase the stability of the crystal circuit of the HSE clock in the PCB layout.

1. The crystal oscillator should be located as close as possible to the MCU to keep the trace length as short as possible to reduce the parasitic capacitance.
2. Shield lines in the vicinity of the crystal by using a ground plane to isolate signals and reduce noise.
3. Keep the high frequency signal lines away from the crystal area to prevent the crosstalk adverse effects.

Internal Clock Characteristics

Table 13. High Speed Internal Clock (HSI) Characteristics

$T_A = 25\text{ }^{\circ}\text{C}$, unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V_{DD}	Operation Range	—	2.0	—	3.6	V
f_{HSI}	HSI Frequency	$V_{DD} = 3.3\text{ V}$ @ 25 $^{\circ}\text{C}$	—	8	—	MHz
ACC_{HSI}	Factory Calibrated HSI Oscillator Frequency Accuracy	$V_{DD} = 3.3\text{ V}$, $T_A = 25\text{ }^{\circ}\text{C}$	-2	—	+2	%
		$V_{DD} = 2.5\text{ V} \sim 3.6\text{ V}$, $T_A = -40\text{ }^{\circ}\text{C} \sim 85\text{ }^{\circ}\text{C}$	-3	—	+3	%
		$V_{DD} = 2.0\text{ V} \sim 3.6\text{ V}$, $T_A = -40\text{ }^{\circ}\text{C} \sim 85\text{ }^{\circ}\text{C}$	-4	—	+4	%
Duty	Duty Cycle	$f_{HSI} = 8\text{ MHz}$	35	—	65	%
I_{DDHSI}	Oscillator Supply Current	$f_{HSI} = 8\text{ MHz}$	—	300	500	μA
	Power Down Current		—	—	0.05	μA
t_{SUHSI}	Startup Time	$f_{HSI} = 8\text{ MHz}$	—	—	10	μs

Table 14. Low Speed Internal Clock (LSI) Characteristics

$T_A = 25\text{ }^{\circ}\text{C}$, unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
f_{LSI}	Low Speed Internal Oscillator Frequency (LSI)	$V_{DD} = 3.3\text{ V}$, $T_A = -40\text{ }^{\circ}\text{C} \sim 85\text{ }^{\circ}\text{C}$	21	32	43	kHz
ACC_{LSI}	LSI Frequency Accuracy	After factory-trimmed, $V_{DD} = 3.3\text{ V}$, $T_A = 25\text{ }^{\circ}\text{C}$	-10	—	+10	%
I_{DDLSI}	LSI Oscillator Operating Current	$V_{DD} = 3.3\text{ V}$, $T_A = 25\text{ }^{\circ}\text{C}$	—	0.4	0.8	μA
t_{SULSI}	LSI Oscillator Startup Time	$V_{DD} = 3.3\text{ V}$, $T_A = 25\text{ }^{\circ}\text{C}$	—	—	100	μs

PLL Characteristics

Table 15. PLL Characteristics

$T_A = 25\text{ }^{\circ}\text{C}$, unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
f_{PLLIN}	PLL input clock	—	4	—	16	MHz
f_{CK_PLL}	PLL output clock	—	16	—	48	MHz
t_{LOCK}	PLL lock time	—	—	200	—	μs

Memory Characteristics

Table 16. Flash Memory Characteristics

$T_A = 25\text{ }^{\circ}\text{C}$, unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
N_{ENDU}	Number of Guaranteed Program/Erase Cycles before Failure (Endurance)	$T_A = -40\text{ }^{\circ}\text{C} \sim 85\text{ }^{\circ}\text{C}$	10	—	—	K cycles
t_{RET}	Data Retention Time	$T_A = -40\text{ }^{\circ}\text{C} \sim 85\text{ }^{\circ}\text{C}$	10	—	—	Years
t_{PROG}	Word Programming Time	$T_A = -40\text{ }^{\circ}\text{C} \sim 85\text{ }^{\circ}\text{C}$	20	—	—	μs
t_{ERASE}	Page Erase Time	$T_A = -40\text{ }^{\circ}\text{C} \sim 85\text{ }^{\circ}\text{C}$	2	—	—	ms
t_{MERASE}	Mass Erase Time	$T_A = -40\text{ }^{\circ}\text{C} \sim 85\text{ }^{\circ}\text{C}$	10	—	—	ms

I/O Port Characteristics

Table 17. I/O Port Characteristics

$T_A = 25\text{ }^{\circ}\text{C}$, unless otherwise specified.

Symbol	Parameter	Conditions		Min.	Typ.	Max.	Unit
I_{IL}	Low Level Input Current	3.3 V I/O	$V_I = V_{SS}$, On-chip pull-up resistor disabled.	—	—	3	μA
		Reset pin		—	—	3	μA
I_{IH}	High Level Input Current	3.3 V I/O	$V_I = V_{DD}$, On-chip pull-down resistor disabled.	—	—	3	μA
		Reset pin		—	—	3	μA

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V_{IL}	Low Level Input Voltage	3.3 V I/O	-0.5	—	$V_{DD} \times 0.35$	V
		Reset pin	-0.5	—	$V_{DD} \times 0.35$	V
V_{IH}	High Level Input Voltage	3.3 V I/O	$V_{DD} \times 0.65$	—	$V_{DD} + 0.5$	V
		Reset pin	$V_{DD} \times 0.65$	—	$V_{DD} + 0.5$	V
V_{HYS}	Schmitt Trigger Input Voltage Hysteresis	3.3 V I/O	—	$0.12 \times V_{DD}$	—	mV
		Reset pin	—	$0.12 \times V_{DD}$	—	
I_{OL}	Low Level Output Current (GPIO Sink Current)	3.3 V I/O 4 mA drive, $V_{OL} = 0.4$ V	4	—	—	mA
		3.3 V I/O 8 mA drive, $V_{OL} = 0.4$ V	8	—	—	
		3.3 V I/O 12 mA drive, $V_{OL} = 0.4$ V	12	—	—	
		3.3 V I/O 16 mA drive, $V_{OL} = 0.4$ V	16	—	—	
I_{OH}	High Level Output Current (GPIO Source Current)	3.3 V I/O 4 mA drive, $V_{OH} = V_{DD} - 0.4$ V	4	—	—	mA
		3.3 V I/O 8 mA drive, $V_{OH} = V_{DD} - 0.4$ V	8	—	—	
		3.3 V I/O 12 mA drive, $V_{OH} = V_{DD} - 0.4$ V	12	—	—	
		3.3 V I/O 16 mA drive, $V_{OH} = V_{DD} - 0.4$ V	16	—	—	
V_{OL}	Low Level Output Voltage	3.3 V 4 mA drive I/O, $I_{OL} = 4$ mA	—	—	0.4	V
		3.3 V 8 mA drive I/O, $I_{OL} = 8$ mA	—	—	0.4	
		3.3 V 12 mA drive I/O, $I_{OL} = 12$ mA	—	—	0.4	
		3.3 V 16 mA drive I/O, $I_{OL} = 16$ mA	—	—	0.4	
V_{OH}	High Level Output Voltage	3.3 V 4 mA drive I/O, $I_{OH} = 4$ mA	$V_{DD} - 0.4$	—	—	V
		3.3 V 8 mA drive I/O, $I_{OH} = 8$ mA	$V_{DD} - 0.4$	—	—	
		3.3 V 12 mA drive I/O, $I_{OH} = 12$ mA	$V_{DD} - 0.4$	—	—	
		3.3 V 16 mA drive I/O, $I_{OH} = 16$ mA	$V_{DD} - 0.4$	—	—	
R_{PU}	Internal Pull-up Resistor	3.3 V I/O	—	46	—	k Ω
R_{PD}	Internal Pull-down Resistor	3.3 V I/O	—	46	—	k Ω

ADC Characteristics

Table 18. ADC Characteristics

$T_A = 25\text{ }^{\circ}\text{C}$, unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V_{DDA}	Operating Voltage	—	2.7	3.3	3.6	V
V_{ADCIN}	A/D Converter Input Voltage Range	—	0	—	V_{REF+}	V
V_{REF+}	A/D Converter Reference Voltage	—	—	V_{DDA}	V_{DDA}	V
I_{ADC}	Current Consumption	$V_{DDA} = 3.3\text{ V}$, 1 Msps	—	0.9	1.0	mA
I_{ADC_DN}	Power Down Current Consumption	$V_{DDA} = 3.3\text{ V}$	—	—	0.1	μA
f_{ADC}	A/D Converter Clock	—	0.7	—	16	MHz
f_s	Sampling Rate	—	0.05	—	1	MHz
t_{DL}	Data Latency	—	—	12.5	—	$1/f_{ADC}$ Cycles
$t_{S\&H}$	Sampling & Hold Time	—	—	3.5	—	$1/f_{ADC}$ Cycles
$t_{ADCCONV}$	A/D Converter Conversion Time	—	—	16	—	$1/f_{ADC}$ Cycles
R_i	Input Sampling Switch Resistance	—	—	—	1	k Ω
C_i	Input Sampling Capacitance	No pin/pad capacitance included	—	16	—	pF
t_{SU}	Startup up Time	—	—	—	1	μs
N	Resolution	—	—	12	—	bit
INL	Integral Non-linearity Error	$f_s = 750\text{ kHz}$, $V_{DDA} = 3.3\text{ V}$	—	± 2	± 5	LSB
DNL	Differential Non-linearity Error	$f_s = 750\text{ kHz}$, $V_{DDA} = 3.3\text{ V}$	—	± 1	—	LSB
E_O	Offset Error	—	—	—	± 10	LSB
E_G	Gain Error	—	—	—	± 10	LSB

Note: 1. Data based on characterization results only, not tested in production.

2. The figure below shows the equivalent circuit of the A/D Converter Sample-and-Hold input stage where C_i is the storage capacitor, R_i is the resistance of the sampling switch and R_s is the output impedance of the signal source V_s . Normally the sampling phase duration is approximately, $3.5/f_{ADC}$. The capacitance, C_i , must be charged within this time frame and it must be ensured that the voltage at its terminals becomes sufficiently close to V_s for accuracy. To guarantee this, R_s is not allowed to have an arbitrarily large value.

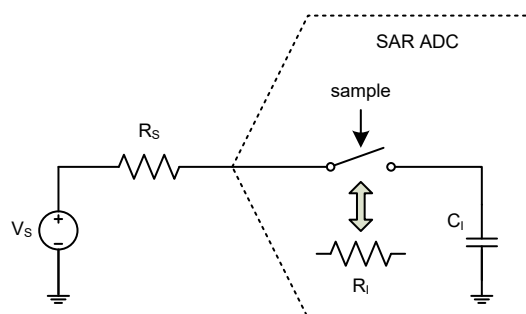


Figure 6. ADC Sampling Network Model

The worst case occurs when the extremities of the input range (0 V and V_{REF}) are sampled consecutively. In this situation a sampling error below $\frac{1}{4}$ LSB is ensured by using the following equation:

$$R_s < \frac{3.5}{f_{ADC} C_i \ln(2^{N+2})} - R_i$$

Where f_{ADC} is the ADC clock frequency and N is the ADC resolution (N = 12 in this case). A safe margin should be considered due to the pin/pad parasitic capacitances, which are not accounted for in this simple model.

If, in a system where the A/D Converter is used, there are no rail-to-rail input voltage variations between consecutive sampling phases, R_s may be larger than the value indicated by the equation above.

SCTM/GPTM Characteristics

Table 19. SCTM/GPTM Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
f_{TM}	Timer Clock Source for GPTM and SCTM	—	—	—	48	MHz
t_{RES}	Timer Resolution Time	—	1	—	—	$1/f_{TM}$
f_{EXT}	External Signal Frequency On Channel 0 ~ 3	—	—	—	1/2	f_{TM}
RES	Timer Resolution	—	—	—	16	bits

I²C Characteristics

Table 20. I²C Characteristics

Symbol	Parameter	Standard Mode		Fast Mode		Fast Plus Mode		Unit
		Min.	Max.	Min.	Max.	Min.	Max.	
f_{SCL}	SCL Clock Frequency	—	100	—	400	—	1000	kHz
$t_{SCL(H)}$	SCL Clock High Time	4.5	—	1.125	—	0.45	—	μ s
$t_{SCL(L)}$	SCL Clock Low Time	4.5	—	1.125	—	0.45	—	μ s
t_{FALL}	SCL and SDA Fall Time	—	1.3	—	0.34	—	0.135	μ s
t_{RISE}	SCL and SDA Rise Time	—	1.3	—	0.34	—	0.135	μ s
$t_{SU(SDA)}$	SDA Data Setup Time	500	—	125	—	50	—	ns
$t_{H(SDA)}$	SDA Data Hold Time	0	—	0	—	0	—	ns
$t_{SU(STA)}$	START Condition Setup Time	500	—	125	—	50	—	ns
$t_{H(STA)}$	START Condition Hold Time	0	—	0	—	0	—	ns
$t_{SU(STO)}$	STOP Condition Setup Time	500	—	125	—	50	—	ns

- Note: 1. Data based on characterization results only, not tested in production.
2. To achieve 100 kHz standard mode, the peripheral clock frequency must be higher than 2 MHz.
3. To achieve 400 kHz fast mode, the peripheral clock frequency must be higher than 8 MHz.
4. To achieve 1 MHz fast mode plus, the peripheral clock frequency must be higher than 20 MHz.
5. The above characteristic parameters of the I²C bus timing are based on: SEQFILTER = 01 and COMBFILTEREN = 0 that COMB_filter is disabled.

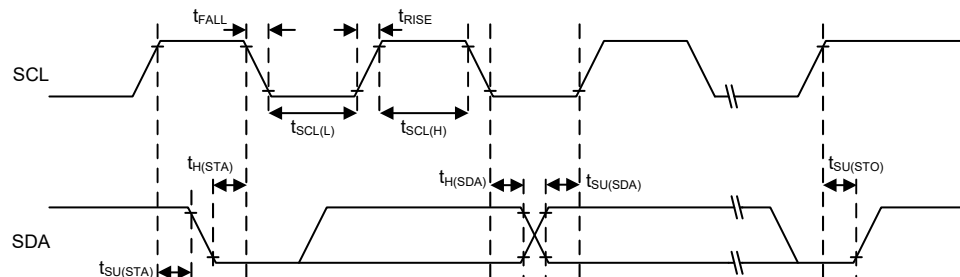


Figure 7. I²C Timing Diagrams

SPI Characteristics

Table 21. SPI Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
SPI Master Mode						
f_{SCK}	SPI Master Output SCK Clock Frequency	Master mode SPI peripheral clock frequency f_{PCLK}	—	—	$f_{PCLK}/2$	MHz
$t_{SCK(H)}$ $t_{SCK(L)}$	SCK Clock High and Low Time	—	$t_{SCK}/2 - 2$	—	$t_{SCK}/2 + 1$	ns
$t_{V(MO)}$	Data Output Valid Time	—	—	—	5	ns
$t_{H(MO)}$	Data Output Hold Time	—	2	—	—	ns
$t_{SU(MI)}$	Data Input Setup Time	—	5	—	—	ns
$t_{H(MI)}$	Data Input Hold Time	—	5	—	—	ns
SPI Slave Mode						
f_{SCK}	SPI Slave Input SCK Clock Frequency	Slave Mode SPI peripheral clock frequency f_{PCLK}	—	—	$f_{PCLK}/3$	MHz
$Duty_{SCK}$	SPI Slave Input SCK Clock Duty Cycle	—	30	—	70	%
$t_{SU(SEL)}$	SEL Enable Setup Time	—	$3 \times t_{PCLK}$	—	—	ns
$t_{H(SEL)}$	SEL Enable Hold Time	—	$2 \times t_{PCLK}$	—	—	ns
$t_{A(SO)}$	Data Output Access Time	—	—	—	$3 \times t_{PCLK}$	ns
$t_{DIS(SO)}$	Data Output Disable Time	—	—	—	10	ns
$t_{V(SO)}$	Data Output Valid Time	—	—	—	25	ns
$t_{H(SO)}$	Data Output Hold Time	—	15	—	—	ns
$t_{SU(SI)}$	Data Input Setup Time	—	5	—	—	ns
$t_{H(SI)}$	Data Input Hold Time	—	4	—	—	ns

Note: 1. f_{SCK} is SPI output/input clock frequency and $t_{SCK} = 1/f_{SCK}$.
2. f_{PCLK} is SPI peripheral clock frequency and $t_{PCLK} = 1/f_{PCLK}$.

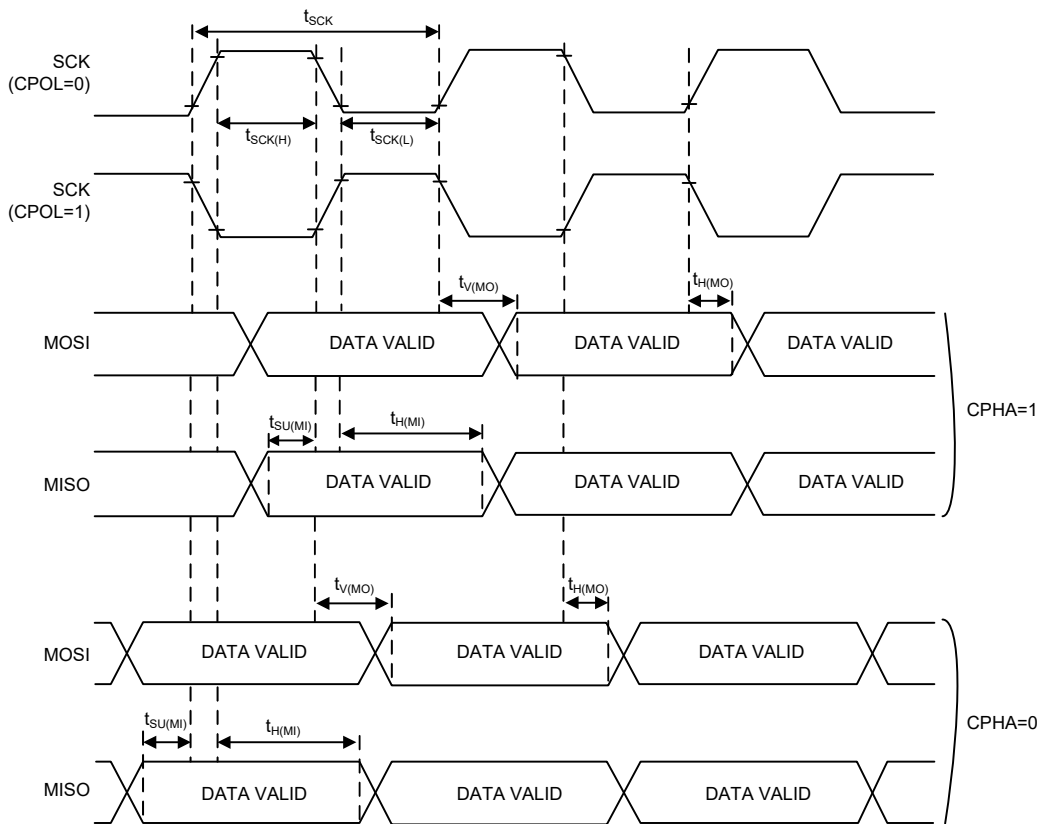


Figure 8. SPI Timing Diagrams – SPI Master Mode

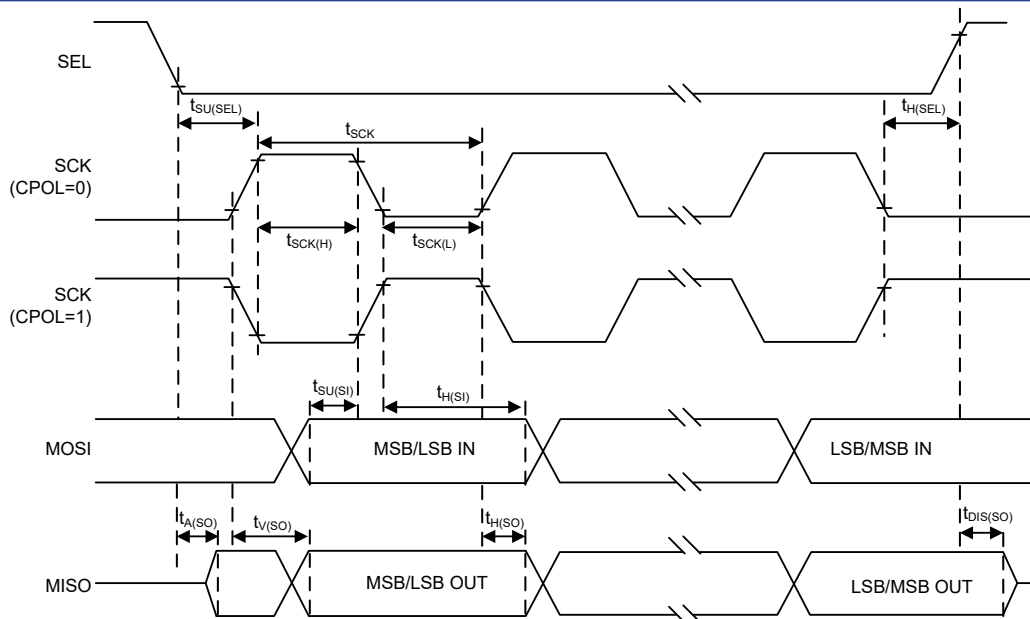


Figure 9. SPI Timing Diagrams – SPI Slave Mode with CPHA = 1

QSPI Characteristics

Table 22. QSPI Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
QSPI Master Mode						
f_{SCK}	QSPI Master Output SCK Clock Frequency	Master mode QSPI peripheral clock frequency f_{HCLK}	—	—	$f_{HCLK}/2$	MHz
$t_{SCK(H)}$ $t_{SCK(L)}$	SCK Clock High and Low Time	—	$t_{SCK}/2 - 2$	—	$t_{SCK}/2 + 1$	ns
$t_{V(MO)}$	Data Output Valid Time	—	—	—	5	ns
$t_{H(MO)}$	Data Output Hold Time	—	2	—	—	ns
$t_{SU(MI)}$	Data Input Setup Time	—	5	—	—	ns
$t_{H(MI)}$	Data Input Hold Time	—	5	—	—	ns
QSPI Slave Mode (1-bit Serial Mode Only)						
f_{SCK}	QSPI Slave Input SCK Clock Frequency	Slave mode QSPI peripheral clock frequency f_{HCLK}	—	—	$f_{HCLK}/3$	MHz
Duty _{SCK}	QSPI Slave Input SCK Clock Duty Cycle	—	30	—	70	%
$t_{SU(SEL)}$	SEL Enable Setup Time	—	$3 \times t_{HCLK}$	—	—	ns
$t_{H(SEL)}$	SEL Enable Hold Time	—	$2 \times t_{HCLK}$	—	—	ns
$t_{A(SO)}$	Data Output Access Time	—	—	—	$3 \times t_{HCLK}$	ns
$t_{DIS(SO)}$	Data Output Disable Time	—	—	—	10	ns
$t_{V(SO)}$	Data Output Valid Time	—	—	—	25	ns
$t_{H(SO)}$	Data Output Hold Time	—	15	—	—	ns
$t_{SU(SI)}$	Data Input Setup Time	—	5	—	—	ns
$t_{H(SI)}$	Data Input Hold Time	—	4	—	—	ns

Note: 1. f_{SCK} is QSPI output/input clock frequency and $t_{SCK} = 1/f_{SCK}$.
2. f_{HCLK} is QSPI peripheral clock frequency and $t_{HCLK} = 1/f_{HCLK}$.

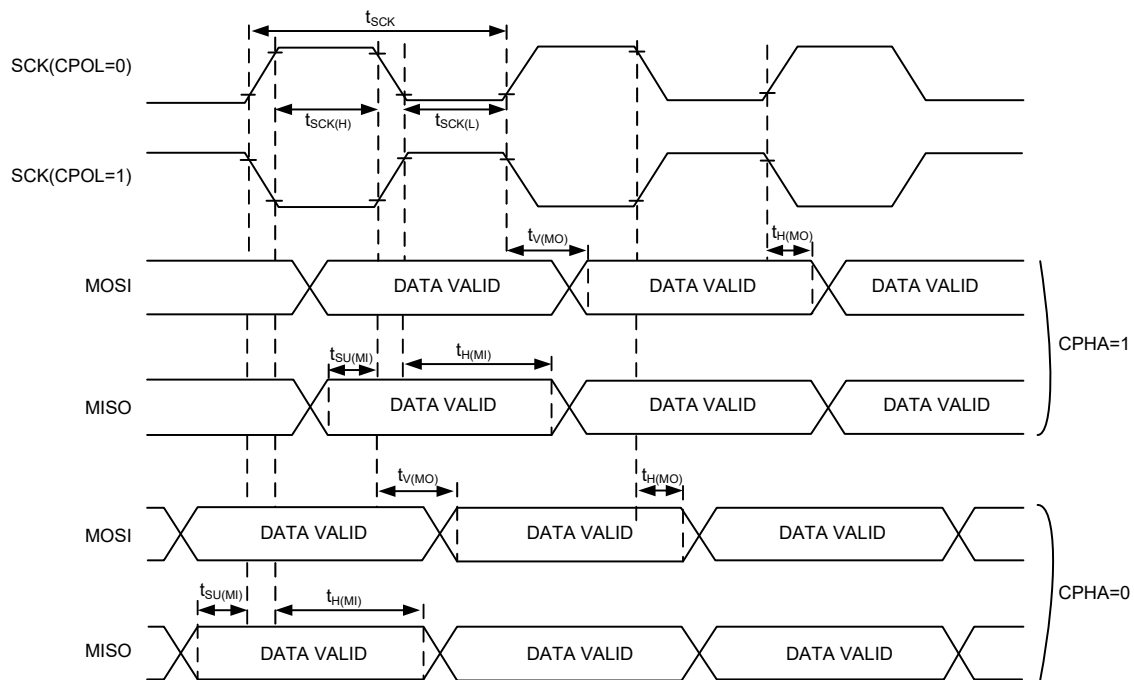


Figure 10. QSPI Timing Diagrams – QSPI Master Mode (1-bit Serial Mode, DUALEN = 0, QUADEN = 0)

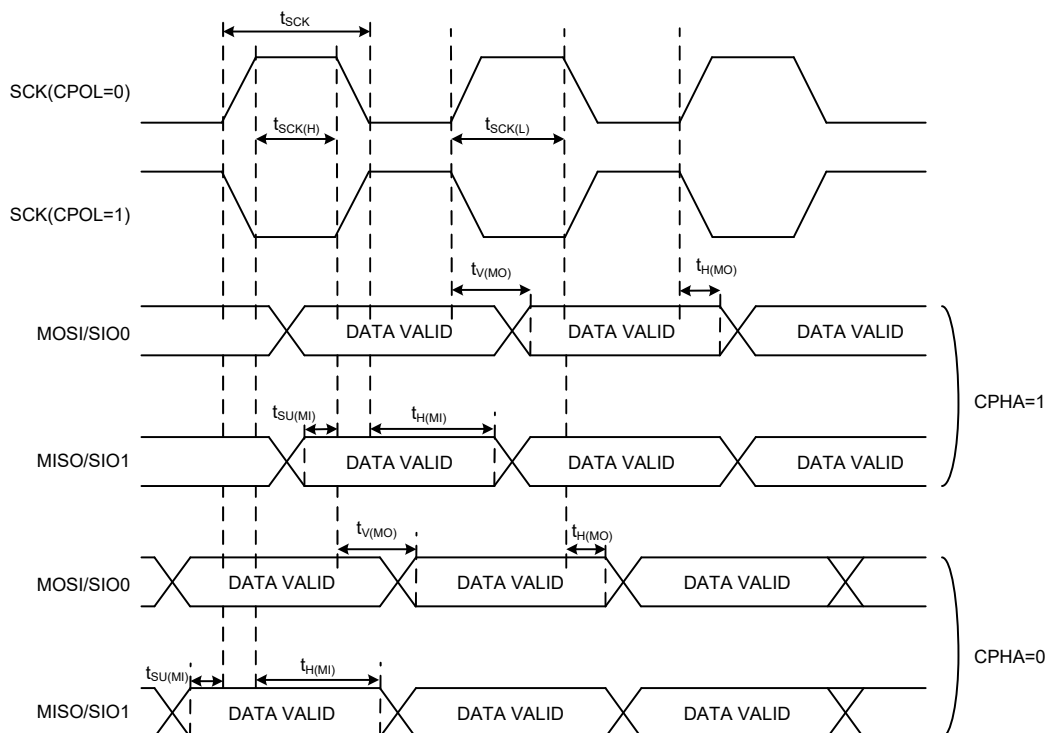


Figure 11. QSPI Timing Diagrams – QSPI Master Mode (Dual Mode, DUALEN = 1)

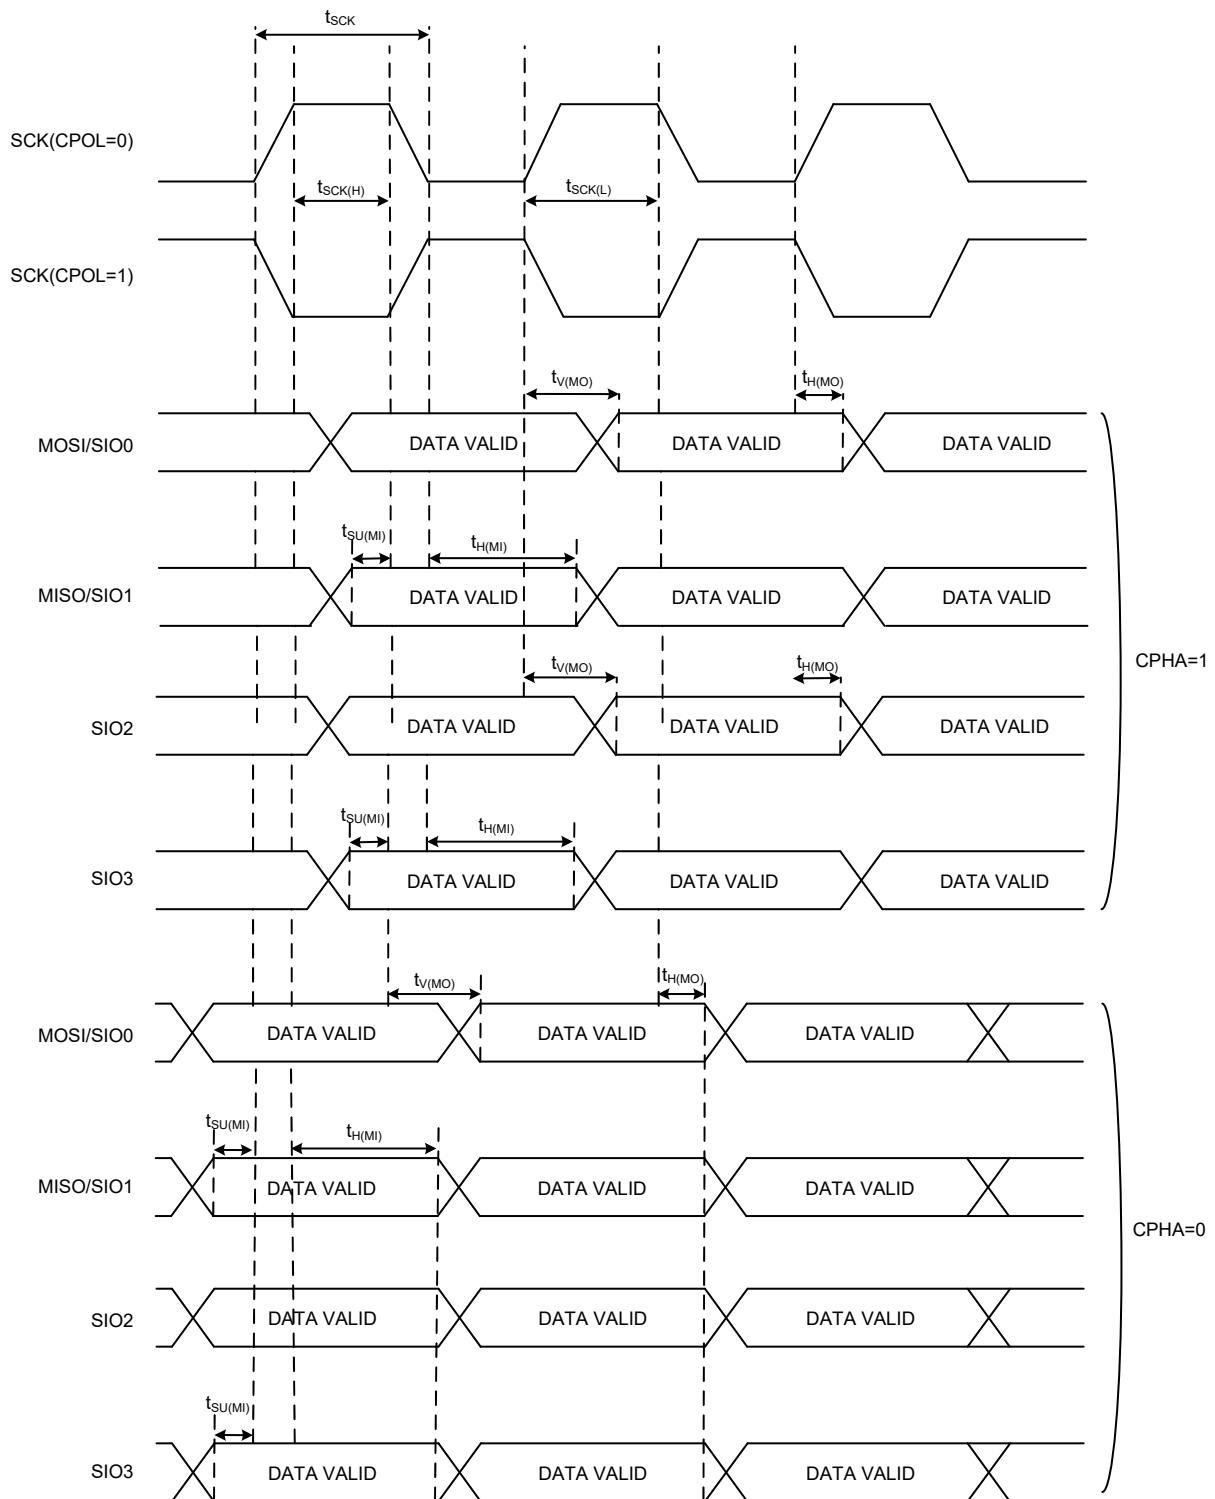


Figure 12. QSPI Timing Diagrams – QSPI Master Mode (Quad Mode, QUADEN = 1)

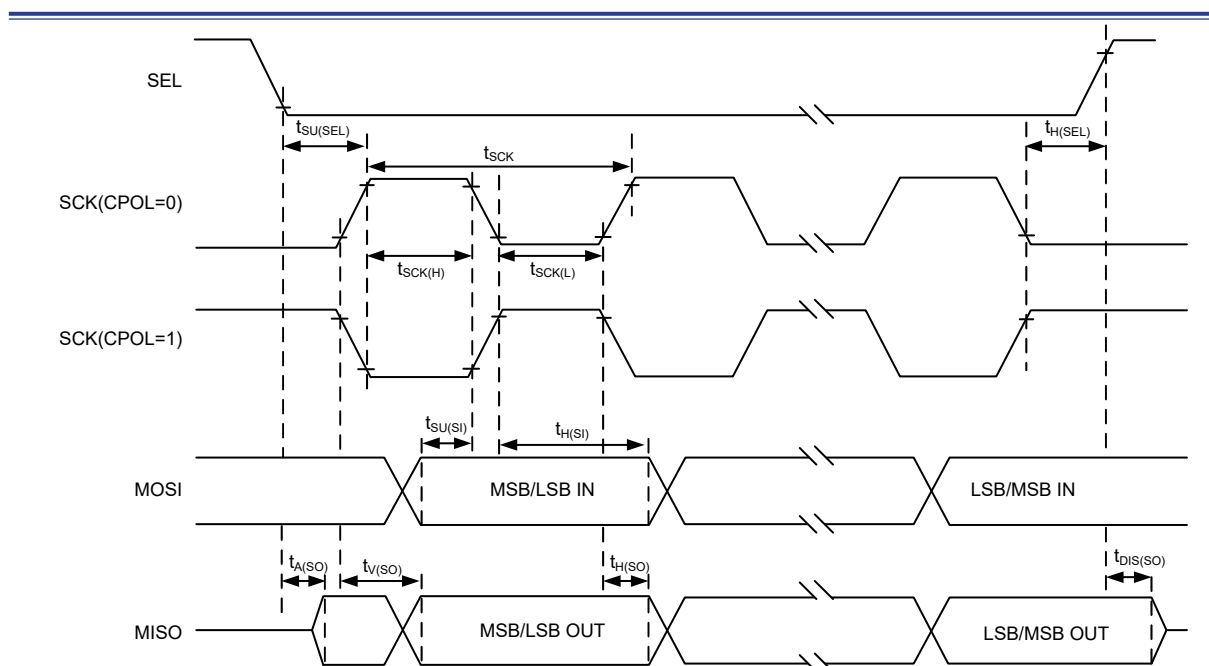


Figure 13. QSPI Timing Diagrams – QSPI Slave Mode with CPHA = 1 (1-bit Serial Mode)

Audio D/A Converter Characteristics

Table 23. Audio D/A Converter Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V_{DD}	Operating Voltage	—	2.2	—	3.6	V
I_{DD}	Operating Current	$V_{DD} = 3\text{ V}$	—	3	—	mA
THD+N	Total Harmonic Distortion + Noise ^(Note)	$V_{DD} = 3\text{ V}$, 10 k Ω load	—	-50	—	dB

Note: Sine wave input @1 kHz, -6 dB.

SPI Flash Data Memory DC Characteristics

Table 24. SPI Flash Data Memory DC Characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V_{DD}	Operating Voltage	—	2.3	—	3.6	V
I_{LI}	Input Leakage Current	—	—	1	± 2	μA
I_{LO}	Output Leakage Current	—	—	1	± 2	μA
I_{STB}	Standby Current	$CS\# = V_{CC}, V_{IN} = V_{DD} \text{ or } V_{CC}$	—	—	2	μA
I_{CC1}	Operating Current (Read)	CLK = 0.1 V_{CC} / 0.9 V_{DD} at 48 MHz, DQ = open	—	6	14	mA
		CLK = 0.1 V_{CC} / 0.9 V_{DD} at 48 MHz, Quad Output Read, DQ = open	—	8.5	20	mA
I_{CC2}	Operating Current (Page Program)	$CS\# = V_{DD}$	—	9	30	mA
V_{IL}	Input Low Voltage	—	-0.5	—	$0.2 \times V_{DD}$	V
V_{IH}	Input High Voltage	—	$0.7 \times V_{DD}$	—	$V_{DD} + 0.4$	V
V_{OL}	Output Low Voltage	$I_{OL} = 100 \mu A, V_{DD} = V_{DD} \text{ Min.}$	—	—	0.3	V
V_{OH}	Output High Voltage	$I_{OH} = -100 \mu A, V_{DD} = V_{DD} \text{ Min.}$	$V_{DD} - 0.2$	—	—	V


8 Package Information

Note that the package information provided here is for consultation purposes only. As this information may be updated at regular intervals users are reminded to consul

Additional supplementary information with regard to packaging is listed below. Click on the relevant section to be transferred to the relevant website page.

- [Package Information \(include Outline Dimensions, Product Tape and Reel Specifications\)](#)
- [The Operation Instruction of Packing Materials](#)
- [Carton information](#)


48-pin LQFP (7 mm × 7 mm) Outline Dimensions

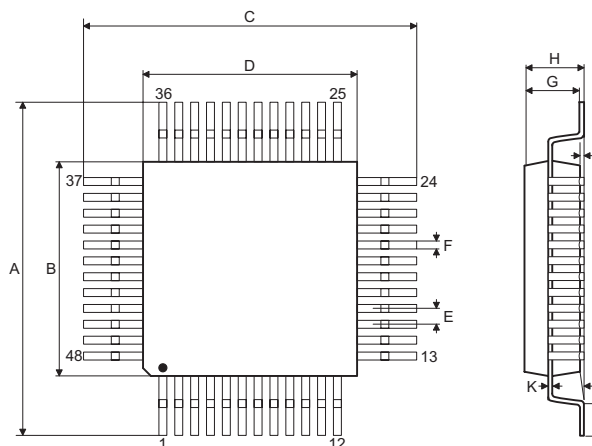

Symbol	Dimensions in inch		
	Min.	Nom.	Max.
A	—	0.354 BSC	—
B	—	0.276 BSC	—
C	—	0.354 BSC	—
D	—	0.276 BSC	—
E	—	0.020 BSC	—
F	0.007	0.009	0.011
G	0.053	0.055	0.057
H	—	—	0.063
I	0.002	—	0.006
J	0.018	0.024	0.030
K	0.004	—	0.008
α	0°	—	7°

Symbol	Dimensions in mm		
	Min.	Nom.	Max.
A	—	9.0 BSC	—
B	—	7.0 BSC	—
C	—	9.0 BSC	—
D	—	7.0 BSC	—
E	—	0.5 BSC	—
F	0.17	0.22	0.27
G	1.35	1.4	1.45
H	—	—	1.60
I	0.05	—	0.15
J	0.45	0.60	0.75
K	0.09	—	0.20
α	0°	—	7°

64-pin LQFP (7 mm × 7 mm) Outline Dimensions

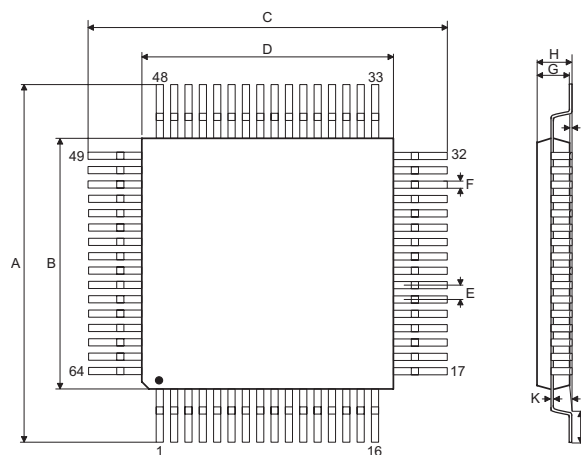

Symbol	Dimensions in inch		
	Min.	Nom.	Max.
A	—	0.354 BSC	—
B	—	0.276 BSC	—
C	—	0.354 BSC	—
D	—	0.276 BSC	—
E	—	0.016 BSC	—
F	0.005	0.007	0.009
G	0.053	0.055	0.057
H	—	—	0.063
I	0.002	—	0.006
J	0.018	0.024	0.030
K	0.004	—	0.008
α	0°	—	7°

Symbol	Dimensions in mm		
	Min.	Nom.	Max.
A	—	9.00 BSC	—
B	—	7.00 BSC	—
C	—	9.00 BSC	—
D	—	7.00 BSC	—
E	—	0.40 BSC	—
F	0.13	0.18	0.23
G	1.35	1.40	1.45
H	—	—	1.60
I	0.05	—	0.15
J	0.45	0.60	0.75
K	0.09	—	0.20
α	0°	—	7°

Copyright© 2022 by HOLTEK SEMICONDUCTOR INC.

The information provided in this document has been produced with reasonable care and attention before publication, however, Holtek does not guarantee that the information is completely accurate and that the applications provided in this document are for reference only. Holtek does not guarantee that these explanations are appropriate, nor does it recommend the use of Holtek's products where there is a risk of personal hazard due to malfunction or other reasons. Holtek hereby declares that it does not authorise the use of these products in life-saving, life-sustaining or critical equipment. Holtek accepts no liability for any damages encountered by customers or third parties due to information errors or omissions contained in this document or damages encountered by the use of the product or the datasheet. Holtek reserves the right to revise the products or specifications described in the document without prior notice. For the latest information, please contact us.