


# AC/DC 150W Enclosed Switching Power Supply

## LM150-22Bxx, LM150-22Bxx-C, LM150-22Bxx-Q series

**MORNSUN**<sup>®</sup>

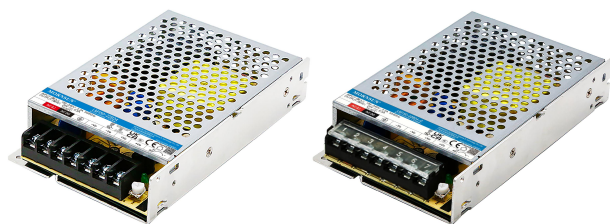

CE Report  
EN62368-1  
EN60335-1  
EN61558-1  
EN61558-2-16

CB  
IEC62368-1

CCC  
GB4943.1

UK  
CA  
BS EN 62368-1

RoHS



ISO9001:2015  
IEC 60890-1:2005  
www.bis.gov.in

### FEATURES

- Universal 165 - 264VAC or 180 - 370VDC Input voltage
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -30°C to +70°C
- Low standby power consumption, high efficiency
- High I/O Isolation test voltage up to 4000VAC
- Low ripple & noise
- Output short circuit, over-current, over-voltage, over-temperature protection
- OVC III (designed to meet EN61558)
- Operating altitude up to 5000m

LM150-22Bxx series is one of Mornsun's enclosed AC-DC switching power supply. It features AC input and at the same time accepts DC input voltage, cost-effective, low no load power consumption, high efficiency, high reliability and double or reinforced insulation. These converters offer excellent EMC performance and meet IEC/EN61000-4, CISPR32/EN55032, UL/EN/IEC62368, EN60335, GB4943 standards and they are widely used in areas of industrial, LED, street light control, electricity, security, telecommunications, smart home etc.

### Selection Guide

Certification	Part No.*	Output Power (W)	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range ADJ (V)	Efficiency at 230VAC (%) Typ.	Max. Capacitive Load (μF)
EN/IEC/CCC/BIS	LM150-22B12	150	12V/12.5A	10.2-13.8	86	10000
	LM150-22B15	150	15V/10A	13.5-18.0	87	6000
	LM150-22B24	156	24V/6.5A	21.6-28.8	88	2500
	LM150-22B36	154.8	36V/4.3A	32.4-39.6	88	1000
	LM150-22B48	158.4	48V/3.3A	43.2-52.8	89	600

Note: 1. \*Use suffix "C" for terminal with protective cover and suffix "Q" for conformal coating.  
2. The product picture is for reference only. For details, please refer to the actual product.

### Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Voltage Range	AC input		165	--	264	VAC
	DC input		180	--	370	VDC
Input Voltage Frequency			47	--	63	Hz
Input Current	230VAC		--	--	2	A
Inrush Current	230VAC	Cold start	--	60	--	
Leakage Current	240VAC		<0.75mA			
Hot Plug			Unavailable			

### Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Full load range		--	±1	--	%
Line Regulation	Rated load		--	±0.5	--	
Load Regulation	0% - 100% load		--	±0.5	--	
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	12V/15V	--	--	150	mV
		24V/36V/48V	--	--	200	
Temperature Coefficient			--	±0.03	--	%/°C
Minimum Load			0	--	--	%
Stand-by Power Consumption			--	--	0.5	W
Hold-up Time	230VAC		--	16	--	ms
Short Circuit Protection	Recovery time <5s after the short circuit disappear.		Hiccup, continuous, self-recovery			

**MORNSUN**<sup>®</sup>

MORNSUN Guangzhou Science & Technology Co., Ltd.

2024.09.10-A/9

Page 1 of 4

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

# AC/DC 150W Enclosed Switching Power Supply

## LM150-22Bxx, LM150-22Bxx-C, LM150-22Bxx-Q series

# MORNSUN®

Over-current Protection		110% - 200% Io, self-recovery	
Over-voltage Protection	12V	≤16VDC	Output voltage turn off, re-power on for recovery
	15V	≤25VDC	
	24V	≤35VDC	
	36V	≤50VDC	
	48V	≤60VDC	
Over-temperature Protection		Output voltage turn off, self-recovery	
Note: *The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information.			

## General Specifications

Item		Operating Conditions		Min.	Typ.	Max.	Unit
Isolation	Input - ⊕	Electric strength test for 1min., leakage current <10mA		2000	--	--	VAC
	Input - output			4000	--	--	
	Output - ⊕			1250	--	--	
Insulation Resistance	Input - ⊕	At 500VDC		50	--	--	MΩ
	Input - output			50	--	--	
	Output - ⊕			50	--	--	
Operating Temperature				-30	--	+70	℃
Storage Temperature				-40	--	+85	
Storage Humidity		Non-condensing		10	--	95	%RH
Operating Humidity				20	--	90	
Switching Frequency				--	65	--	kHz
Power Derating	Operating temperature derating	12V output	+45℃ to +70℃	2.0	--	--	% /℃
		Other output	+50℃ to +70℃	2.5	--	--	
Safety Standard				IEC/EN/BS EN 62368-, IS13252 (Part1), GB4943.1 safety approved & EN60335-1, EN61558-1/EN61558-2-16; Design refer to UL62368-1			
Safety Class				CLASS I			
MTBF		MIL-HDBK-217F@25℃		>300,000 h			

## Mechanical Specifications

Case Material	Metal (AL1100, SGCC)
Dimensions	159.00 x 97.00 x 30.00mm
Weight	395g (Typ.)
Cooling Method	Free air convection

## Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032	CLASS B	
	RE	CISPR32/EN55032	CLASS B	
	Harmonic current	IEC/EN61000-3-2	CLASS A (≤80% Load)	
Immunity	ESD	IEC/EN61000-4-2	Contact ±6KV/Air ±8KV	Perf. Criteria A
	RS	IEC/EN61000-4-3	10V/m	Perf. Criteria A
	EFT	IEC/EN61000-4-4	±4KV	Perf. Criteria A
	Surge	IEC/EN61000-4-5	line to line ±2KV/line to PE ±4KV	Perf. Criteria A
	CS	IEC/EN61000-4-6	10Vr.m.s	Perf. Criteria A
	Voltage dips, short interruptions and voltage variations immunity	IEC/EN61000-4-11	100% dip 1 periods, 30% dip 25 periods, 100% interruptions 250 periods	Perf. Criteria B

# MORNSUN®



MORNSUN Guangzhou Science & Technology Co., Ltd.

2024.09.10-A/9



Page 2 of 4

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

## Product Characteristic Curve

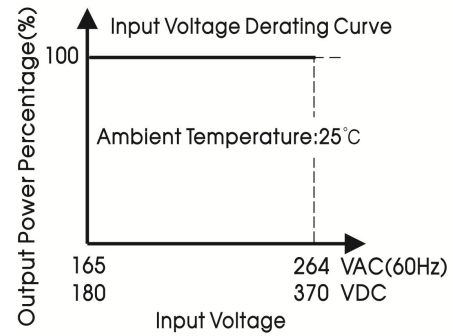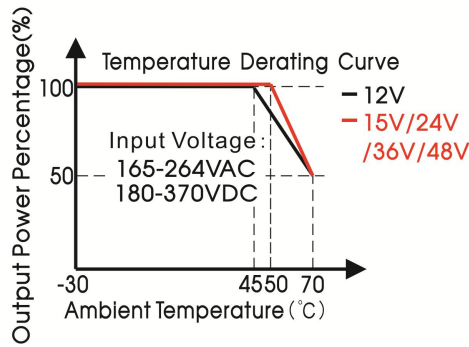


Note: This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.

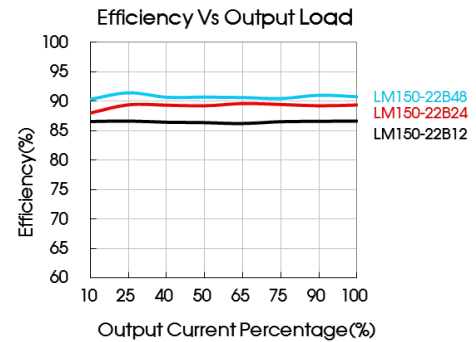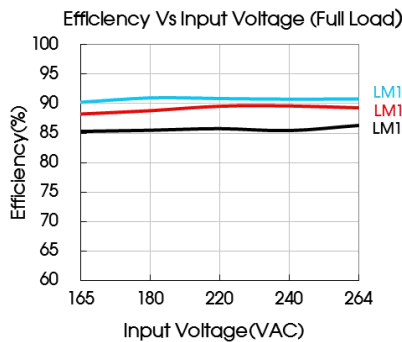


## Dimensions and Recommended Layout

### LM150-22Bxx, LM150-22Bxx-Q Series

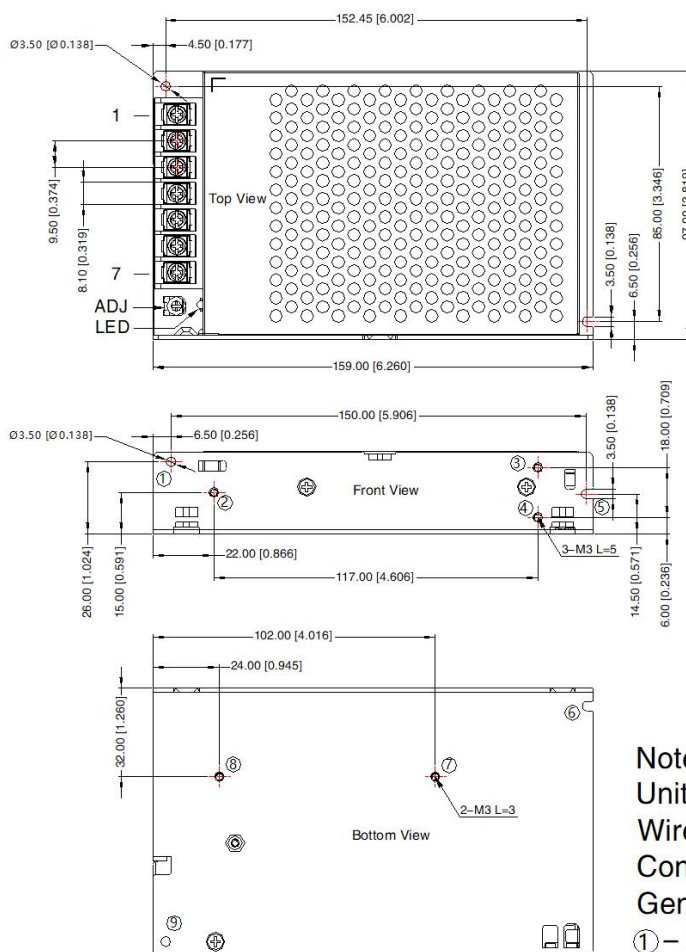


THIRD ANGLE PROJECTION

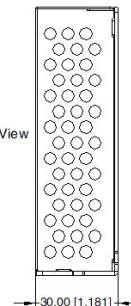

Pin-Out	
Pin	Function
1	AC(L)
2	AC(N)
3	⊥
4	-Vo
5	-Vo
6	+Vo
7	+Vo

Position	Screw Spec.	L(max)	Torque(max)
② - ④	M3	5mm	0.4N·m
⑦ - ⑧	M3	3mm	0.4N·m

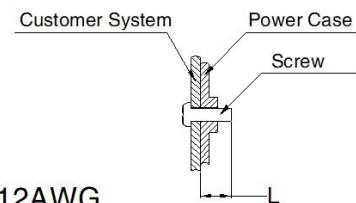

Note:

Unit: mm[inch]


Wire range: 22-12AWG

Connector tightening torque: M3.5, 0.8N·m

General tolerances:  $\pm 1.00 [\pm 0.039]$

① - ⑨ any position must be connected to PE

## LM150-22Bxx-C Series

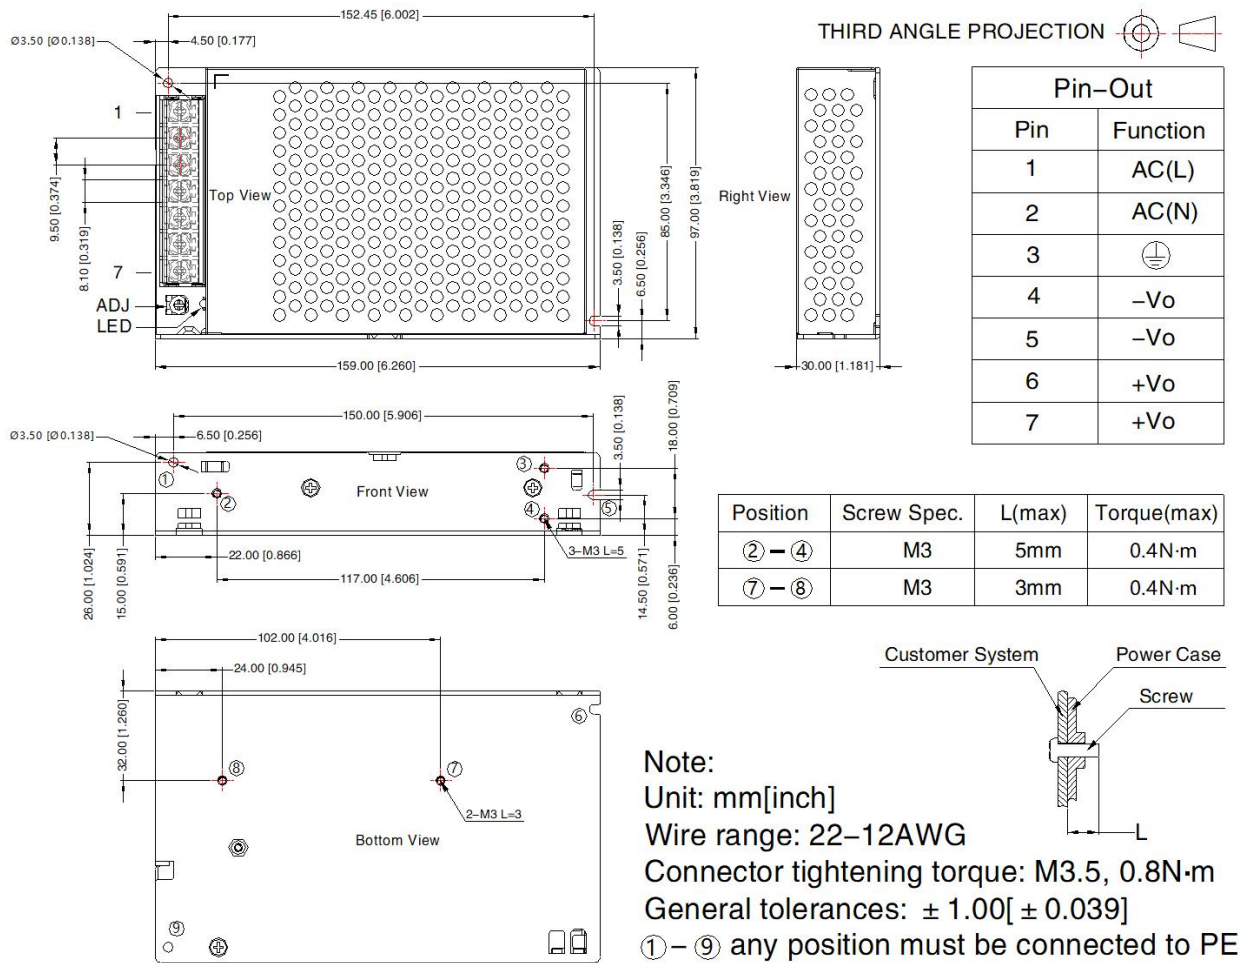

### Note:

- For additional information on Product Packaging please refer to [www.mornsun-power.com](http://www.mornsun-power.com). Packaging bag number: 58220111;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of  $T_a=25^\circ\text{C}$ , humidity<75% RH with nominal input voltage and rated output load;
- The ambient temperature derating of  $5^\circ\text{C}/1000\text{m}$  is needed for operating altitude greater than 2000m;
- All index testing methods in this datasheet are based on our company corporate standards;
- In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- The out case needs to be connected to PE ( $\perp$ ) of system when the terminal equipment in operating;
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units;
- The power supply is considered a component which will be installed into a terminal equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions.

## Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 8 Nanyun 4th Road, Huangpu District, Guangzhou, China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: [info@mornsun.cn](mailto:info@mornsun.cn)

[www.mornsun-power.com](http://www.mornsun-power.com)