

AC/DC 150W Enclosed Switching Power Supply

LM150-20Bxx, LM150-20Bxx-C, LM150-20Bxx-Q series

MORNSUN®



CE Report

EN62368-1
EN60335-1
EN61558-1
EN61558-2-16

CB

IEC62368-1

CCC

GB4943.1

UKCA

BS EN 62368-1

RoHS

RoHS

IEC 62368-1:2019
IEC 60335-1:2006
EN 61558-1:2014
www.mn.gov.cn

FEATURES

- Universal 85 - 264VAC or 120 - 370VDC Input voltage
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -30℃ to +70℃
- Low standby power consumption, high efficiency
- High I/O isolation test voltage up to 4000VAC
- Low ripple & noise
- Output short circuit, over-current, over-voltage, over-temperature protection
- OVC III (designed to meet EN61558)
- Operating altitude up to 5000m

LM150-20Bxx series is one of Mornsun's enclosed AC-DC switching power supply. It features universal AC input and at the same time accepts DC input voltage, cost-effective, low no load power consumption, high efficiency, high reliability and double or reinforced insulation. These converters offer excellent EMC performance and meet IEC/EN61000-4, CISPR32/EN55032, IEC/EN/UL62368, EN60335, GB4943 standards and they are widely used in areas of industrial, LED, street light control, electricity, security, telecommunications, smart home etc.

Selection Guide

Certification	Part No.*	Output Power (W)	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range ADJ (V)	Efficiency at 230VAC (%) Typ.	Max. Capacitive Load (μF)
EN/IEC/CCC/BIS	LM150-20B12	150	12V/12.5A	10.2-13.8	86	10000
	LM150-20B15	150	15V/10A	13.5 -18	87	6000
	LM150-20B24	156	24V/6.5A	21.6 - 28.8	88	2400
	LM150-20B36	154.8	36V/4.3A	32.4 - 39.6	88	1200
	LM150-20B48	158.4	48V/3.3A	43.2 -52.8	89	600

Note: *Use suffix "C" for terminal with protective cover and suffix "Q" for conformal coating.

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Voltage Range	AC input		85	--	264	VAC
	DC input		120	--	370	VDC
Input Voltage Frequency			47	--	63	Hz
Input Current	115VAC		--	--	4	A
	230VAC		--	--	2	
Inrush Current	115VAC	Cold start	--	30	--	
	230VAC		--	60	--	
Leakage Current	240VAC		<0.75mA			
Hot Plug			Unavailable			

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Full load range		--	±1	--	%
Line Regulation	Rated load		--	±0.5	--	
Load Regulation	0% - 100% load		--	±0.5	--	
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	12V/15V	--	--	150	mV
		24V/36V/48V	--	--	200	
Temperature Coefficient			--	±0.03	--	%/℃
Minimum Load			0	--	--	%
Stand-by Power Consumption			--	--	0.5	W
Hold-up Time	115VAC		8	--	--	ms

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2024.08.12-A/0

Page 1 of 4

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

AC/DC 150W Enclosed Switching Power Supply

LM150-20Bxx, LM150-20Bxx-C, LM150-20Bxx-Q series

MORNSUN®

	230VAC	16	--	--	
Short Circuit Protection	Recovery time <5s after the short circuit disappear.	Hiccup, continuous, self-recover			
Over-current Protection		110%-150% Io, self-recover			
Over-voltage Protection	12V	≤16.2V	Output voltage turn off, re-power on for recovery		
	15V	≤21.75V			
	24V	≤33.6V			
	36V	≤48.6V			
	48V	≤60V			
Over-temperature Protection		Output voltage turn off, self-recover			
Note: *The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information.					

General Specifications

Item		Operating Conditions			Min.	Typ.	Max.	Unit
Isolation	Input - \oplus	Electric strength test for 1min., leakage current <10mA			2000	--	--	VAC
	Input - output				4000	--	--	
	Output - \oplus				1250	--	--	
Insulation Resistance	Input - \oplus	At 500VDC			50	--	--	M Ω
	Input - output				50	--	--	
	Output - \oplus				50	--	--	
Operating Temperature					-30	--	+70	℃
Storage Temperature					-40	--	+85	
Storage Humidity		Non-condensing			10	--	95	%RH
Operating Humidity					20	--	90	
Switching Frequency					--	65	--	kHz
Power Derating		Operating temperature derating	85VAC-100VAC	-30℃ to -25℃	5	--	--	% /℃
			12V	+45℃ to +70℃	2	--	--	
			15V/24V/36V/48V	+50℃ to +70℃	2.5	--	--	
		Input voltage derating		85VAC-100VAC	1.33	--	--	%/VAC
Safety Standard					IEC/BS EN/EN62368-1, IS13252 (Part1), GB4943.1, EN60335-1, EN61558-1, EN61558-2-16 safety approved; Design refer to UL62368-1			
Safety Class					CLASS I			
MTBF		MIL-HDBK-217F@25℃			>300,000 h			

Mechanical Specifications

Case Material	Metal (AL1100, SGCC)
Dimensions	159.00 x 97.00 x 30.00mm
Weight	410g (Typ.)
Cooling Method	Free air convection

Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032	CLASS B	
	RE	CISPR32/EN55032	CLASS B	
	Harmonic current	IEC/EN61000-3-2	CLASS A (≤80% Load)	
Immunity	ESD	IEC/EN61000-4-2	Contact ±6KV/Air ±8KV	perf. Criteria A
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	±4KV	perf. Criteria A
	Surge	IEC/EN61000-4-5	line to line ±2KV/line to ground ±4KV	perf. Criteria A
	CS	IEC/EN61000-4-6	10Vr.m.s	perf. Criteria A
	Voltage dip, short interruption and voltage variation	IEC/EN61000-4-11	100% dip 1 periods, 30% dip 25 periods, 100% interruptions 250 periods	perf. Criteria B

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2024.08.12-A/0

Page 2 of 4

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

Temperature Derating Curve

Output Power Percentage (%)

Ambient Temperature (°C)

230VAC


<100VAC Input

Input Voltage :
85-264VAC
120-370VDC



— 12V
— 15V/24V/
36V/48V

The graph shows that for ambient temperatures between -30°C and 45°C, the output power is constant at 100% for all input voltages. Between 45°C and 70°C, the output power derates linearly to 50% for all input voltages. For ambient temperatures below -30°C, the output power derates linearly from 100% at -30°C to 75% at -25°C. The derating curve is identical for all input voltages shown (12V, 15V/24V/36V/48V).


Ambient Temperature (°C)	Output Power Percentage (%)
-30	100
-25	75
45	100
70	50

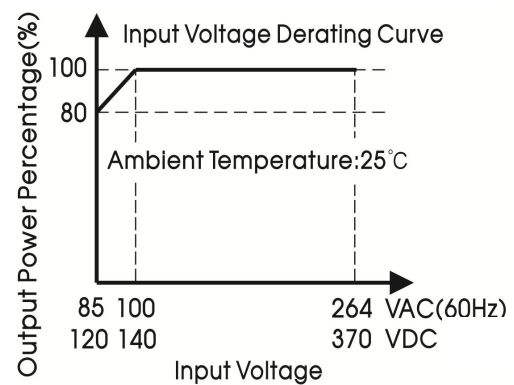


2. This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.

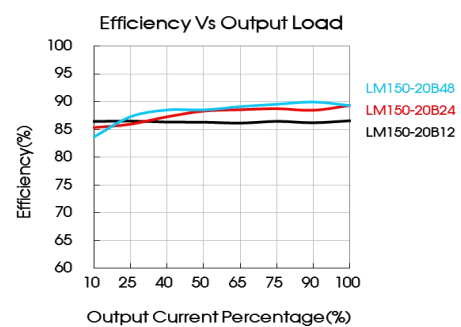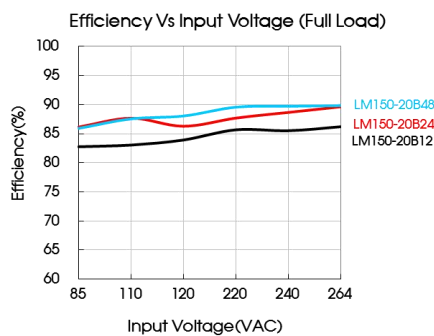


LM150-20Bxx, LM150-20Bxx-Q Series

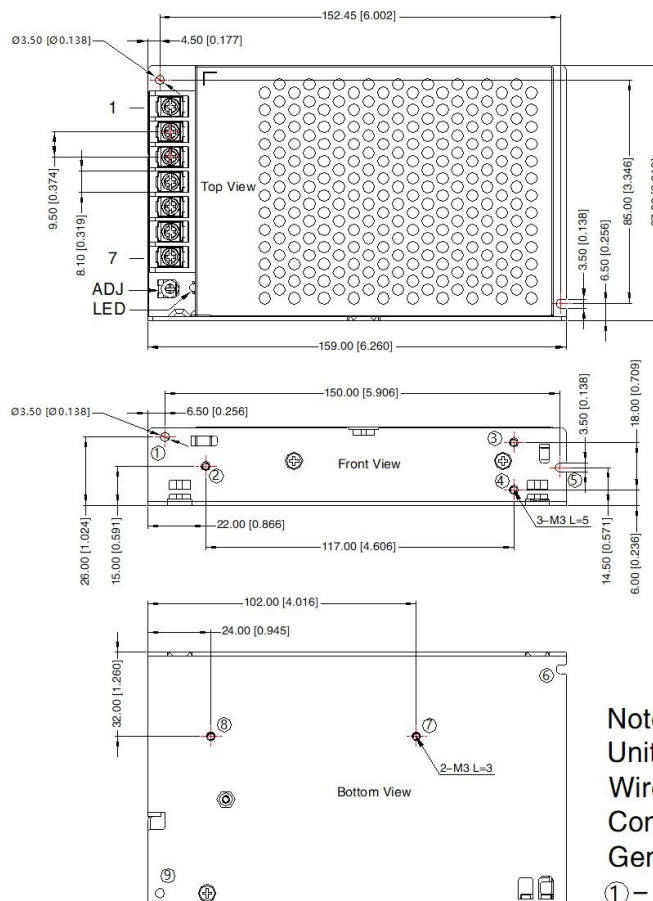

THIRD ANGLE PROJECTION


Pin-Out	
Pin	Function
1	AC(L)
2	AC(N)
3	
4	-Vo
5	-Vo
6	+Vo
7	+Vo

Position	Screw Spec.	L(max)	Torque(max)
②－④	M3	5mm	0.4N・m
⑦－⑧	M3	3mm	0.4N・m




① – ⑨ any position must be connected to PE

LM150-20Bxx-C Series

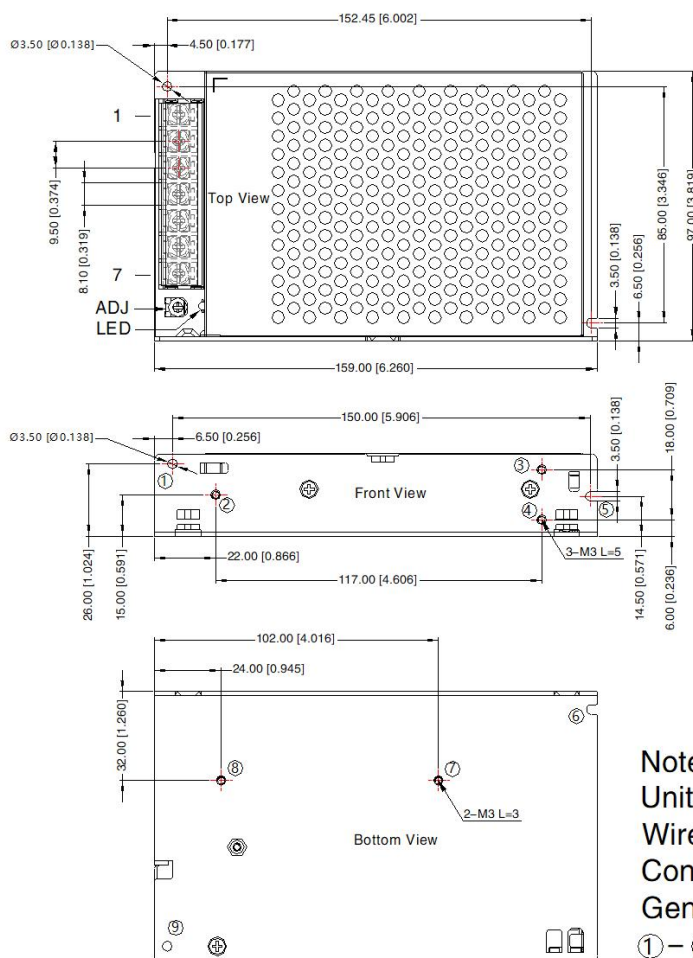


THIRD ANGLE PROJECTION



Pin-Out	
Pin	Function
1	AC(L)
2	AC(N)
3	⏏
4	-Vo
5	-Vo
6	+Vo
7	+Vo

Position	Screw Spec.	L(max)	Torque(max)
② - ④	M3	5mm	0.4N·m
⑦ - ⑧	M3	3mm	0.4N·m



Note:
 Unit: mm[inch]
 Wire range: 22-12AWG
 Connector tightening torque: M3.5, 0.8N·m
 General tolerances: $\pm 1.00 [\pm 0.039]$
 ① - ⑨ any position must be connected to PE

Note:

- For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58220111;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^\circ\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
- The room temperature derating of $5^\circ\text{C}/1000\text{m}$ is needed for operating altitude greater than 2000m;
- All index testing methods in this datasheet are based on our company corporate standards;
- In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- The out case needs to be connected to the earth (⏏) of system when the terminal equipment in operating;
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cn

www.mornsun-power.com